


GYM FLOORING



Hospital



School



Office



Kindergarten




Store



Restaurant



Beadhouse



Other



EPDM Rubber Flooring Tiles



Surface: 3-5mm thick
 Material: 14~16 mesh rubber particles + colorful EPDM
 Color: Red / Yellow / Blue / Green / Grey / Black



Bottom :
 Material: 8~10 mesh / 14~16 mesh rubber particles
 Color: Black

Features:

- Easy Installation
- Perfect for heavy area
- Easy to clean and maintain
- Multiple Colors to choose from
- Provides a Removable floor surface
- Provides impact absorbing protection
- Low maintenance and long time use


Application:

Rubber tiles gym act as a durable, sound inhibiting barrier between the floor and the equipment.
 This rubber flooring tile is suitable in various sport and exercise areas, like weight lifting rooms, fitness room, kids playrooms and so on.



Model	Size (mm)	Thickness (mm)	Conection	Work Temperature	Color Option
CZY-100	500*500	15	Splicing	- 40°C~100°C	
		20			
		25			
		30			
		40			
	1000*1000	50			
		15			
		20			
		25			
		30			


EPDM Rubber Flooring Tiles

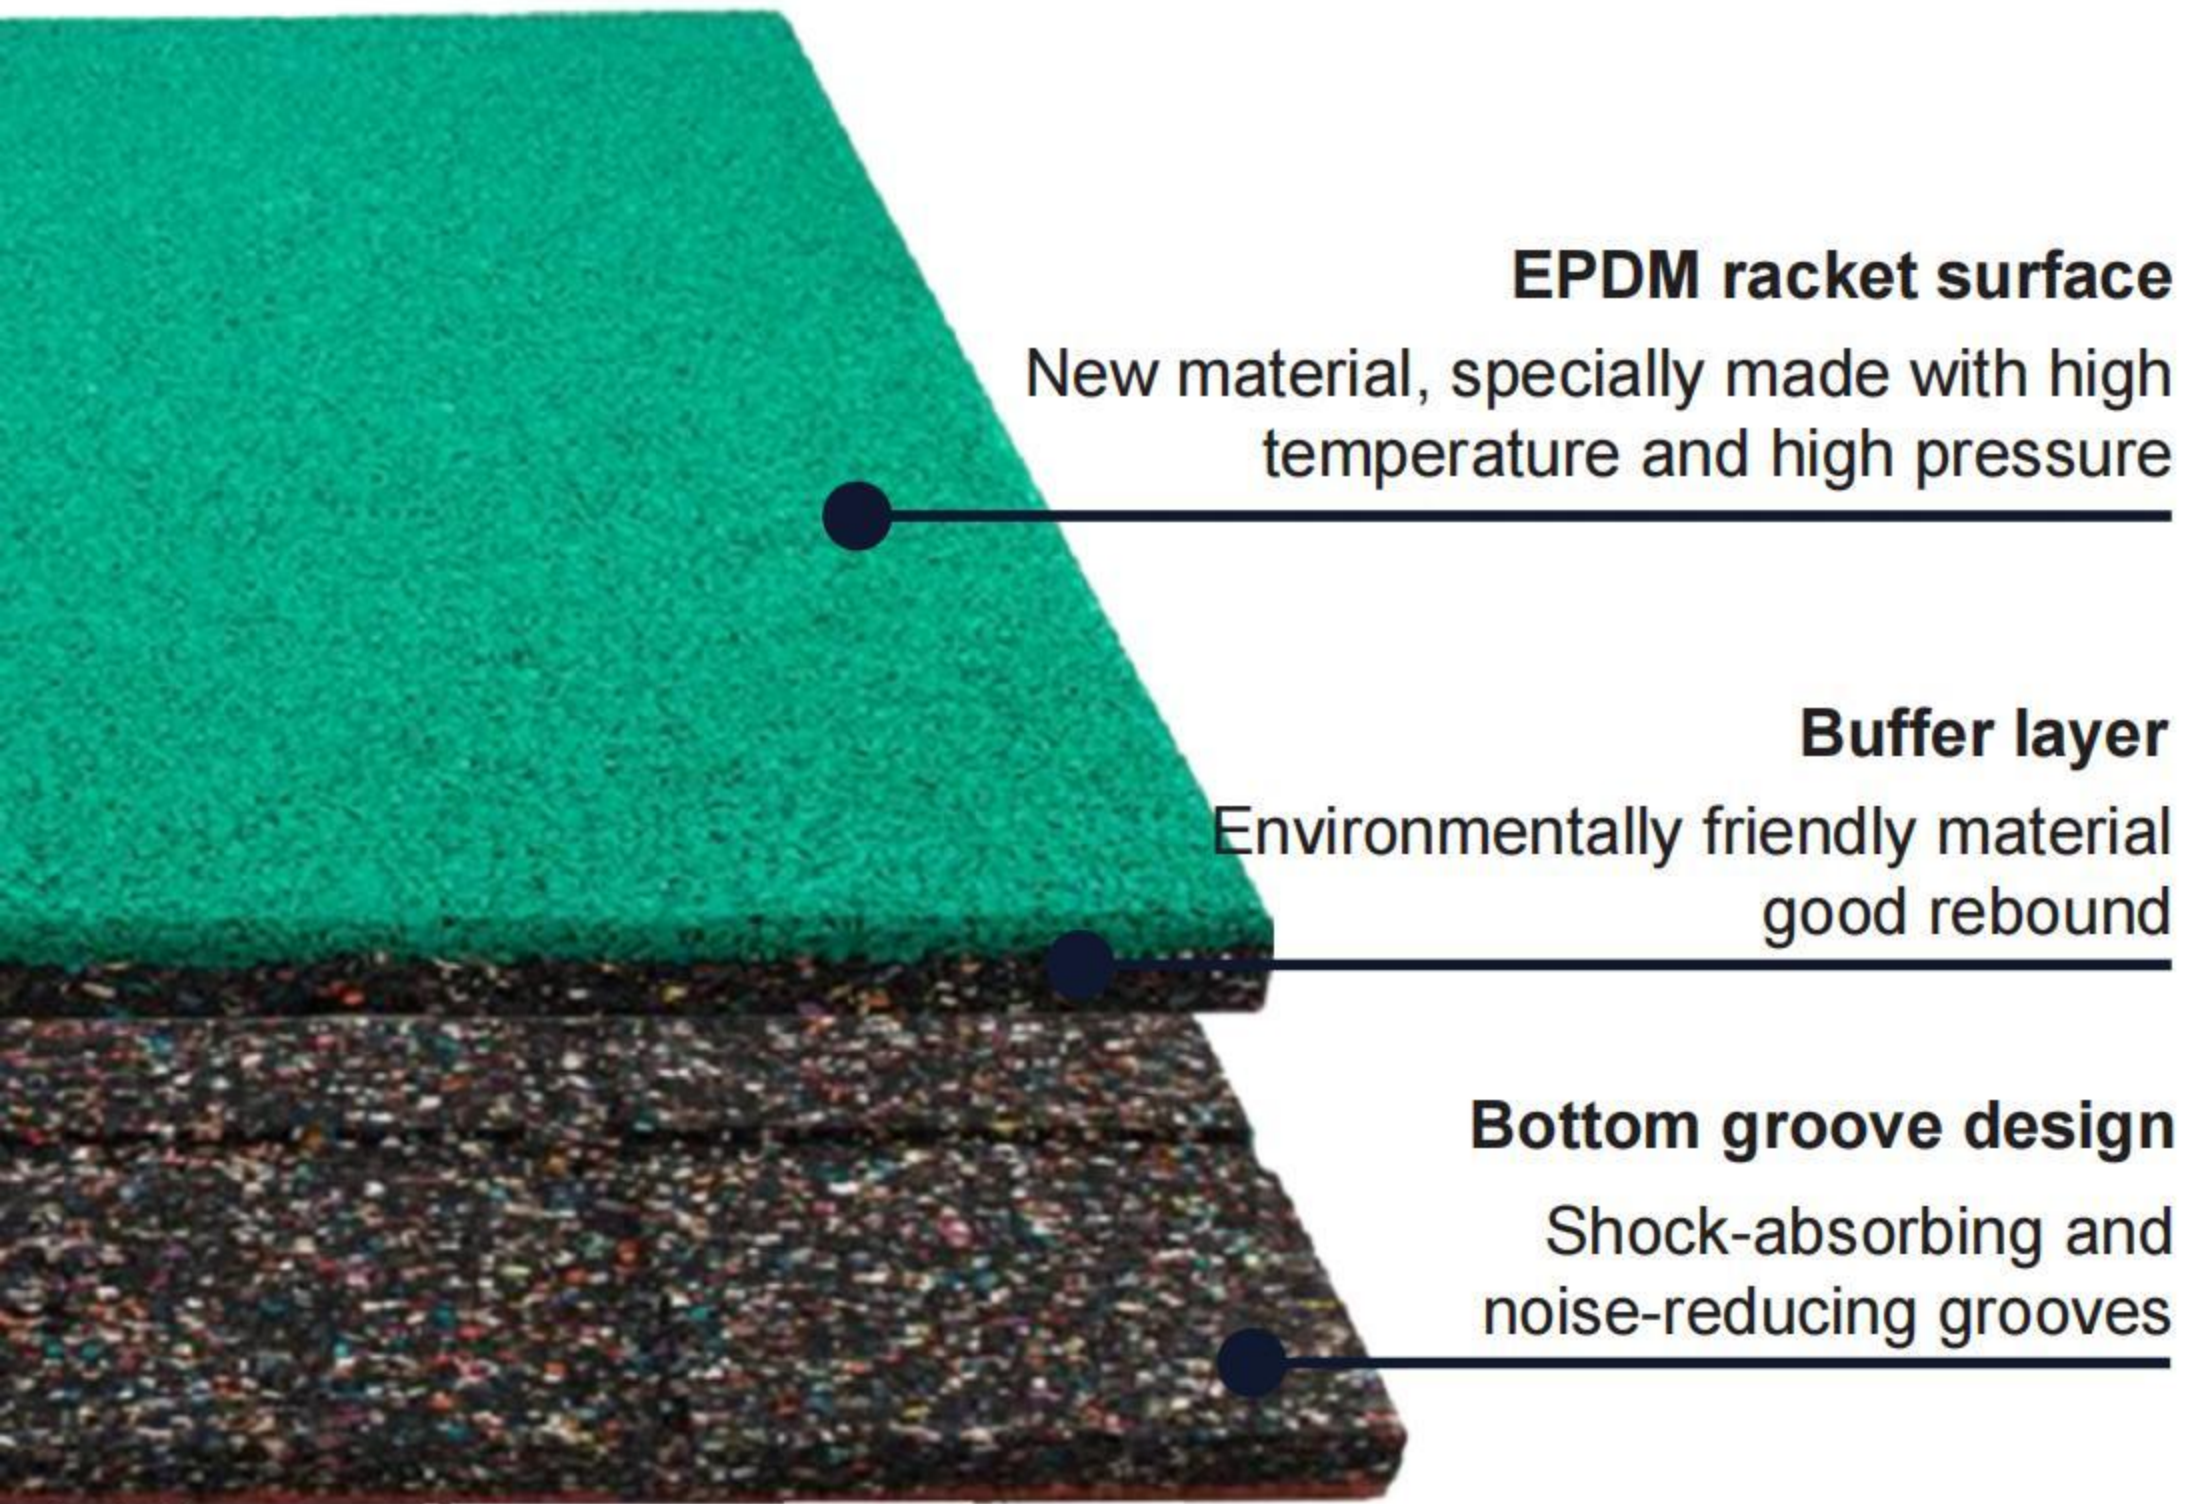

NO-TYP-DESCRIPTION	Size (mm)	Thickness (mm)
	500*500	15 / 20 / 25 / 30 / 35 / 40 / 45 / 50
	1000*500	15 / 20 / 25 / 30 / 35 / 40 / 45 / 50
	1000*1000	15 / 20 / 25 / 30 / 35



Symphony Rubber Tiles

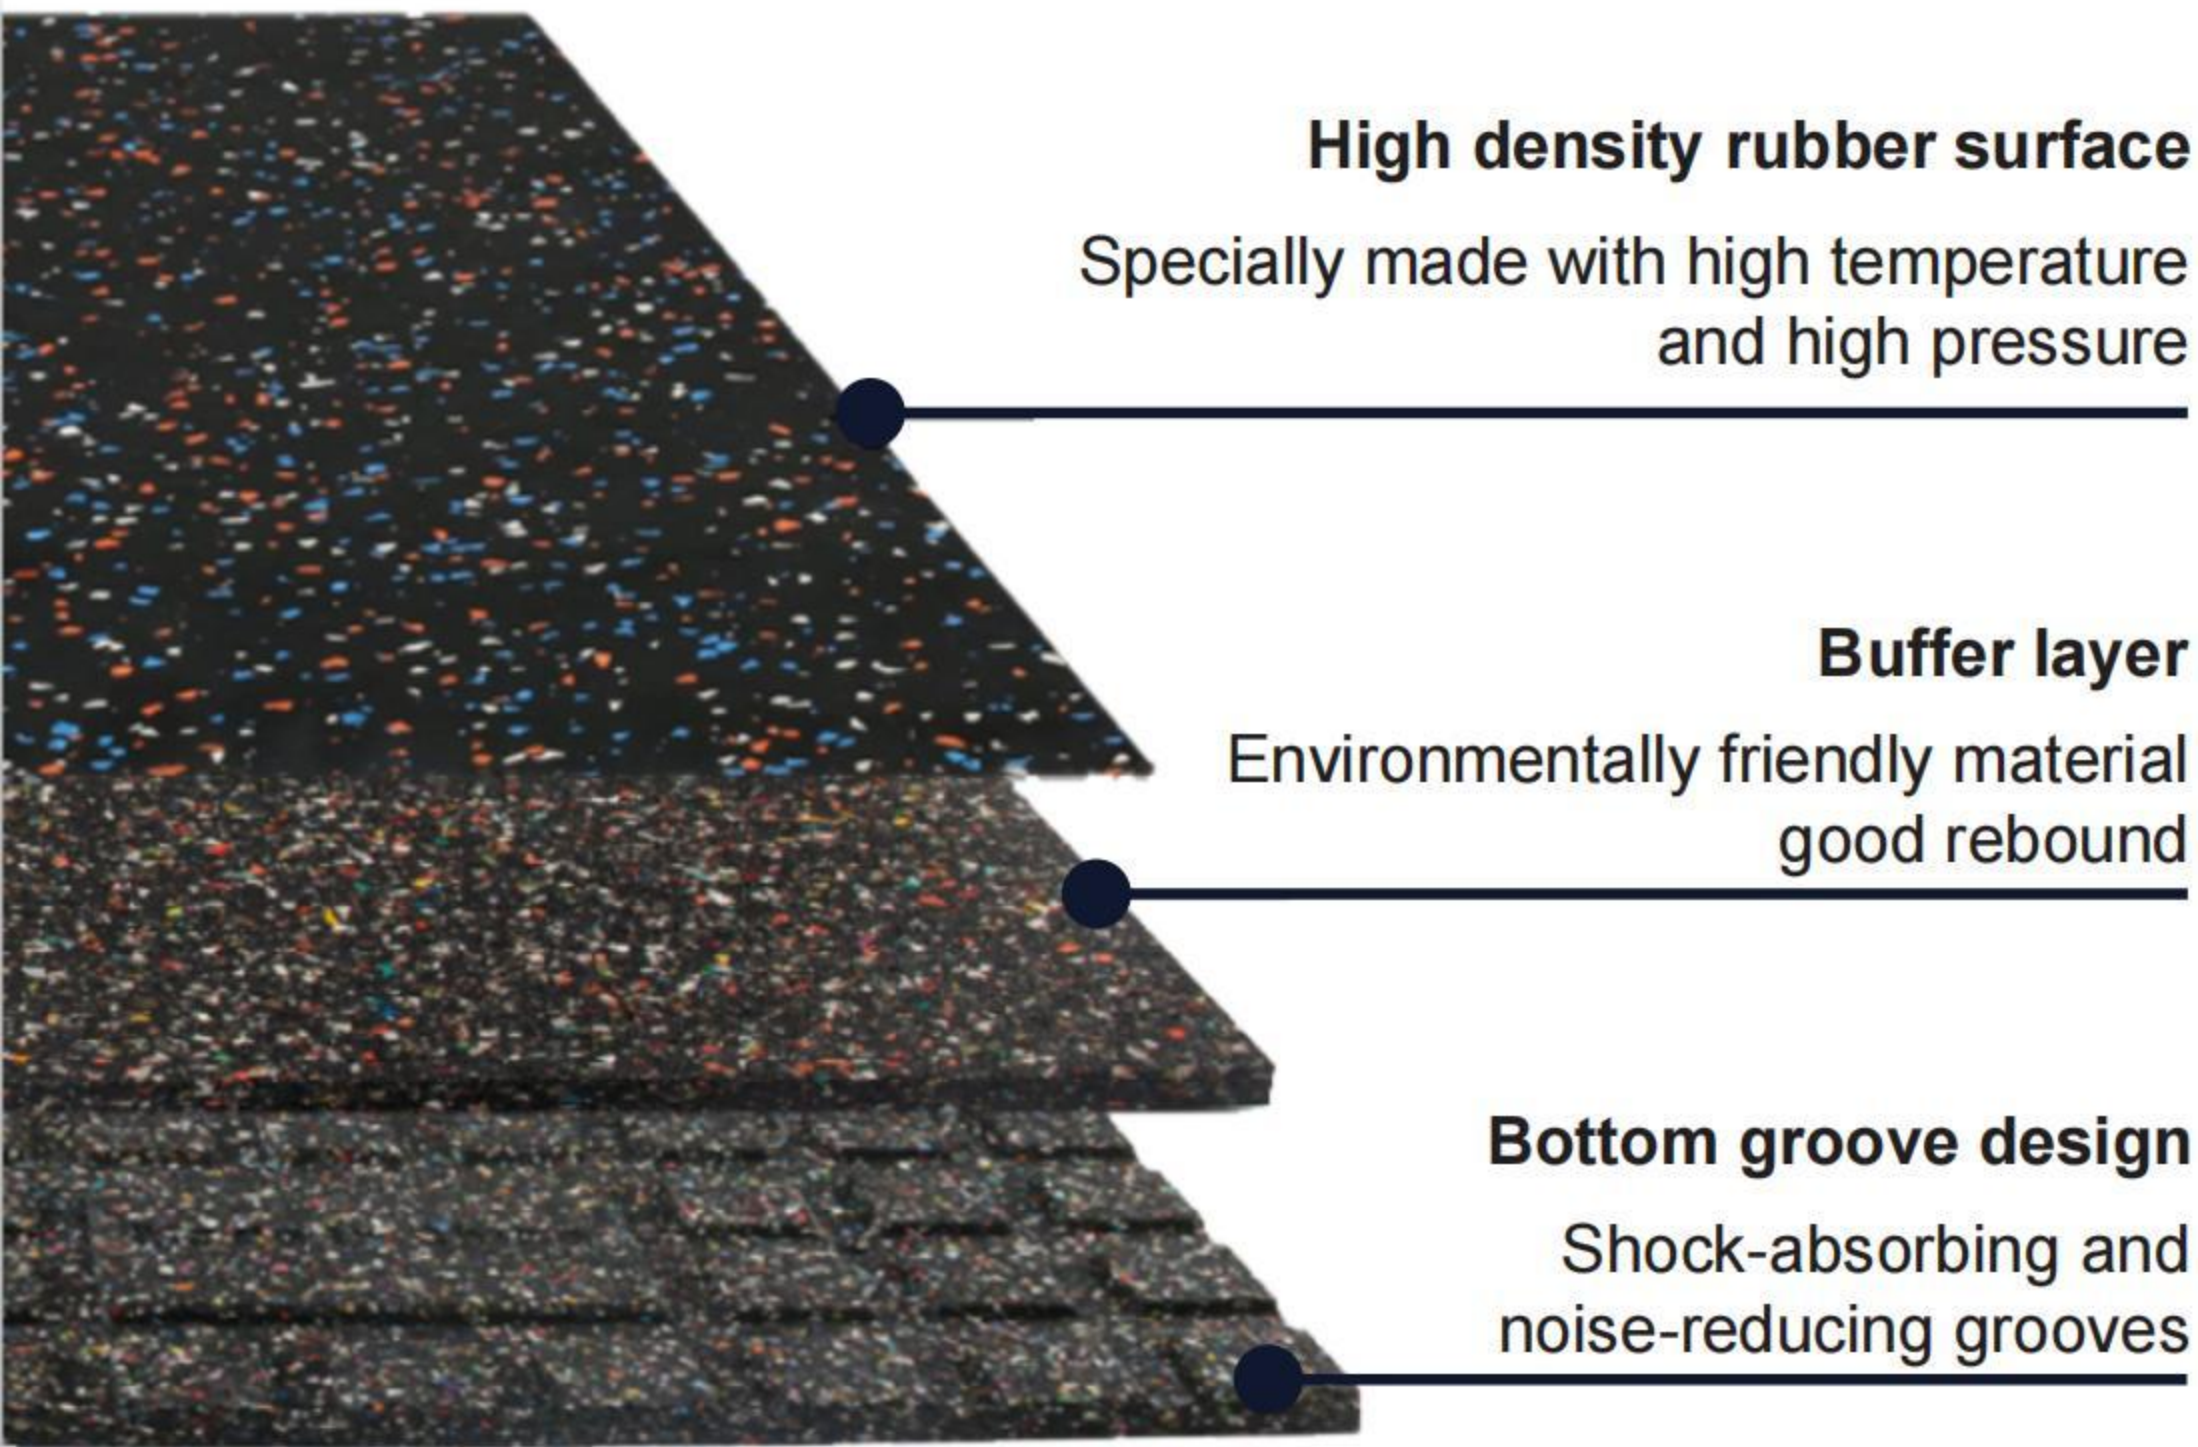

Size (mm)	
500*500	15 / 20 / 25 / 30 / 35 / 40 / 45 / 50
1000*500	15 / 20 / 25 / 30 / 35 / 40 / 45 / 50
1000*1000	15 / 20 / 25 / 30 / 35



EPDM Rubber Flooring Roll



Spec.: Width 1m / 1.25m, Thickness 2~12mm
Customized Length

Material: Black or grey SBR + 1~3 color EPDM

Connection: Splicing

Features:



- Made with quality craftsmanship and materials
- Black with 15% EPDM fleck, durable resilient rubber floor surfacing
- Rolled material requires no adhesive for easy installation
- High water resistance, easy to clean and maintenance
- Sound insulation, anti-static electricity, flame retardant
- Non-toxic, non-polluting, anti-fouling, germproof
- Customise welcome




Elastic



Wear-resistant

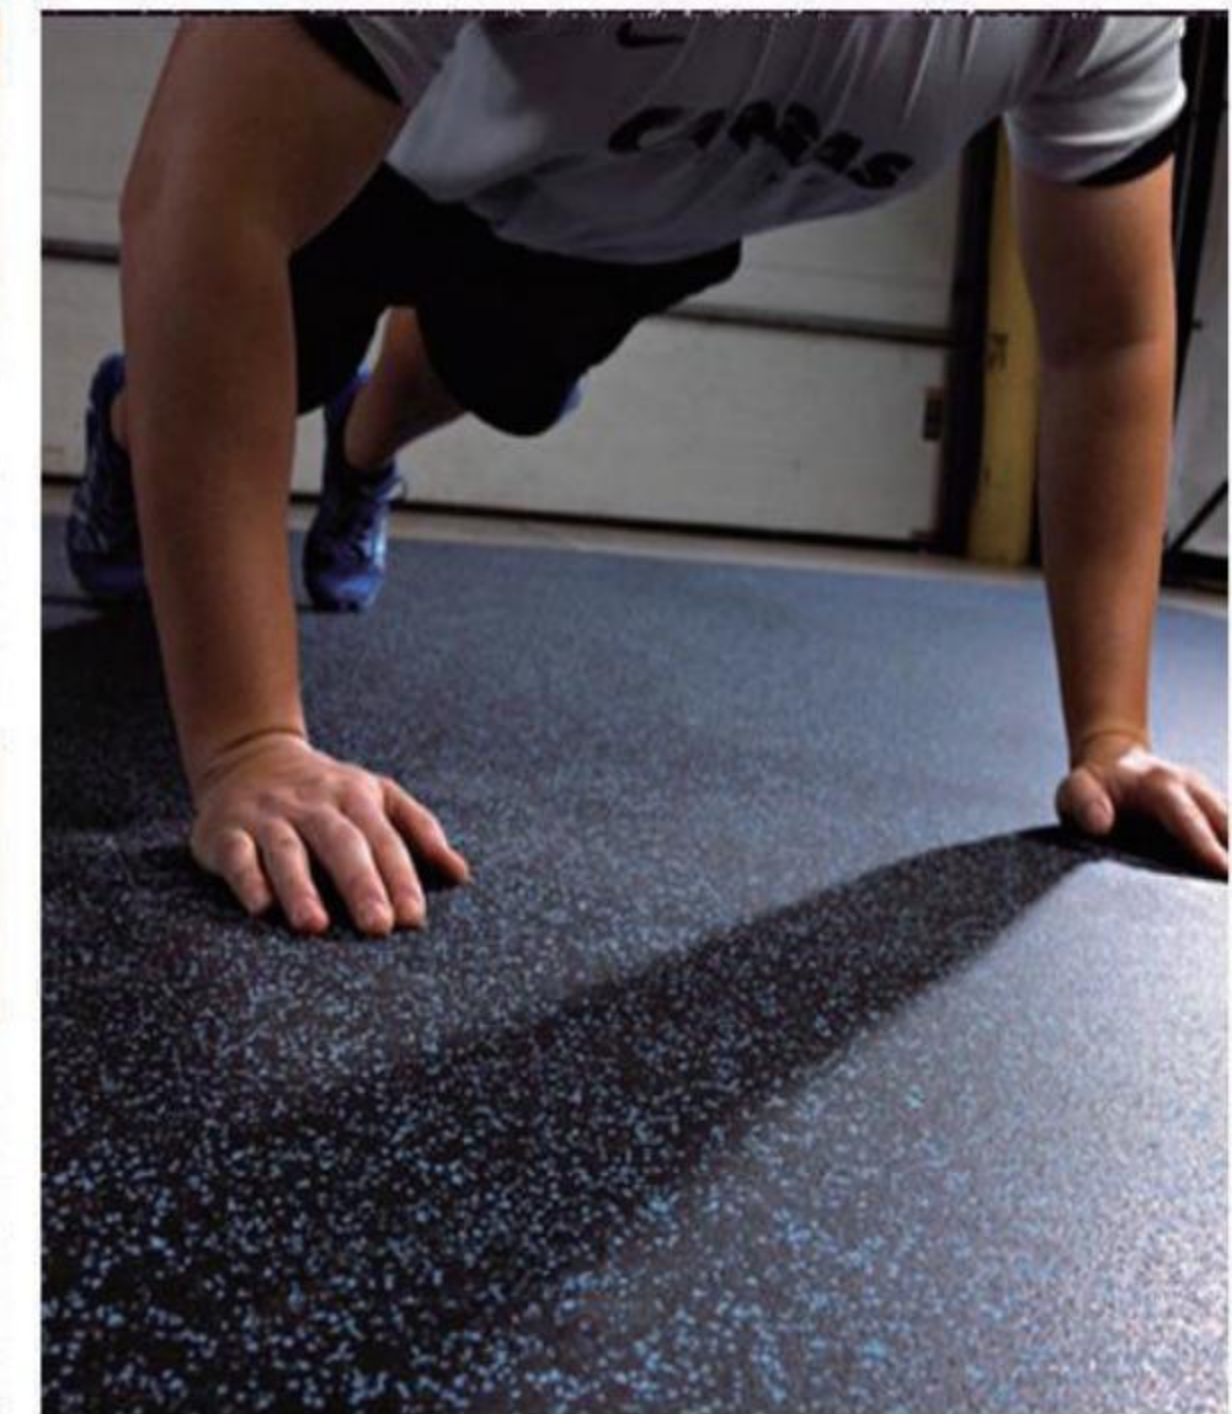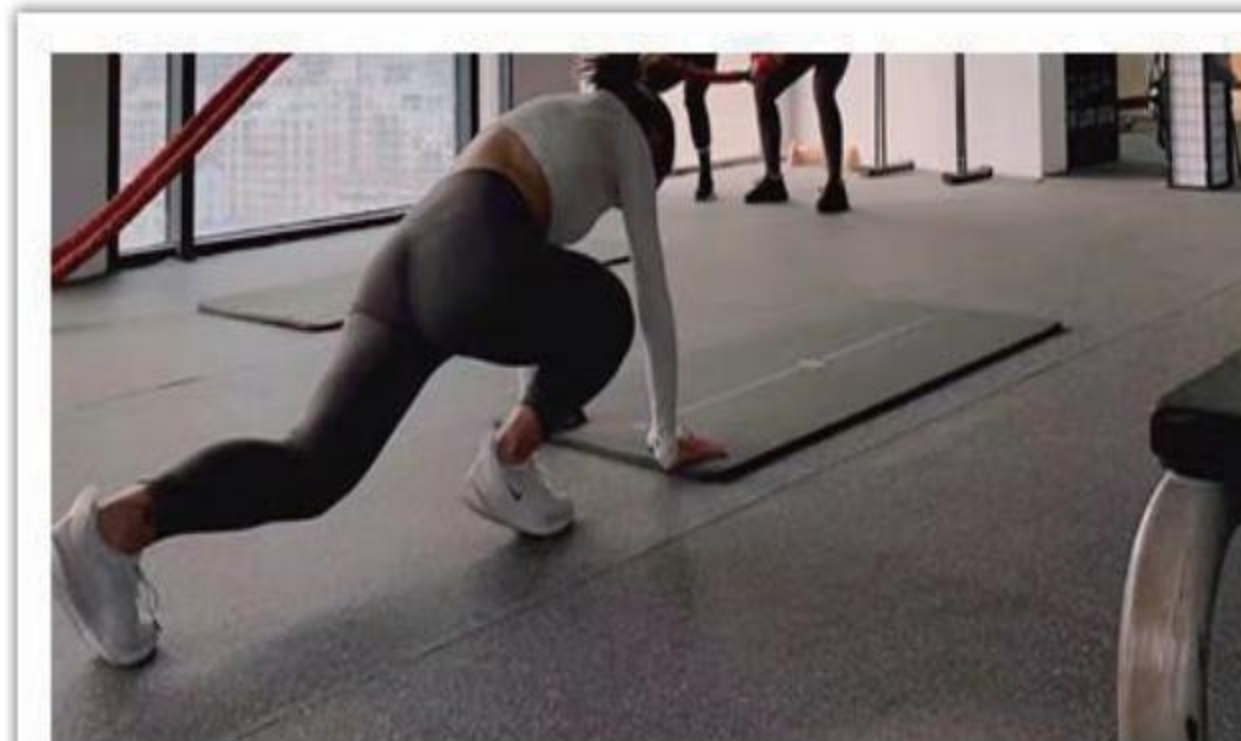

Color Options:

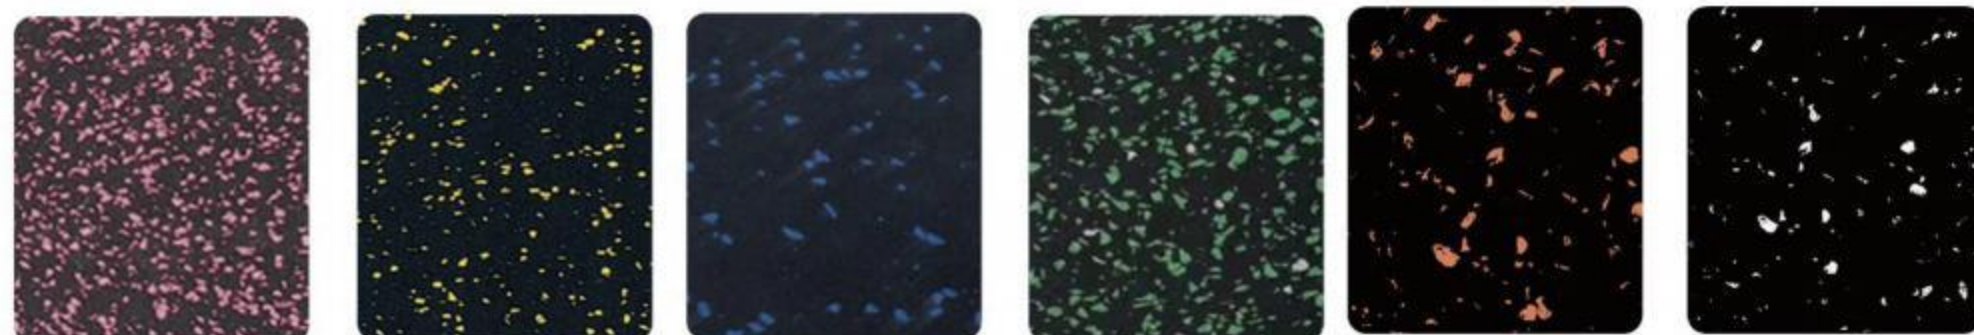

EPDM Rubber Flooring Roll



Hospital

School

Office


Kindergarten

Store

Restaurant

Beadhouse


Other

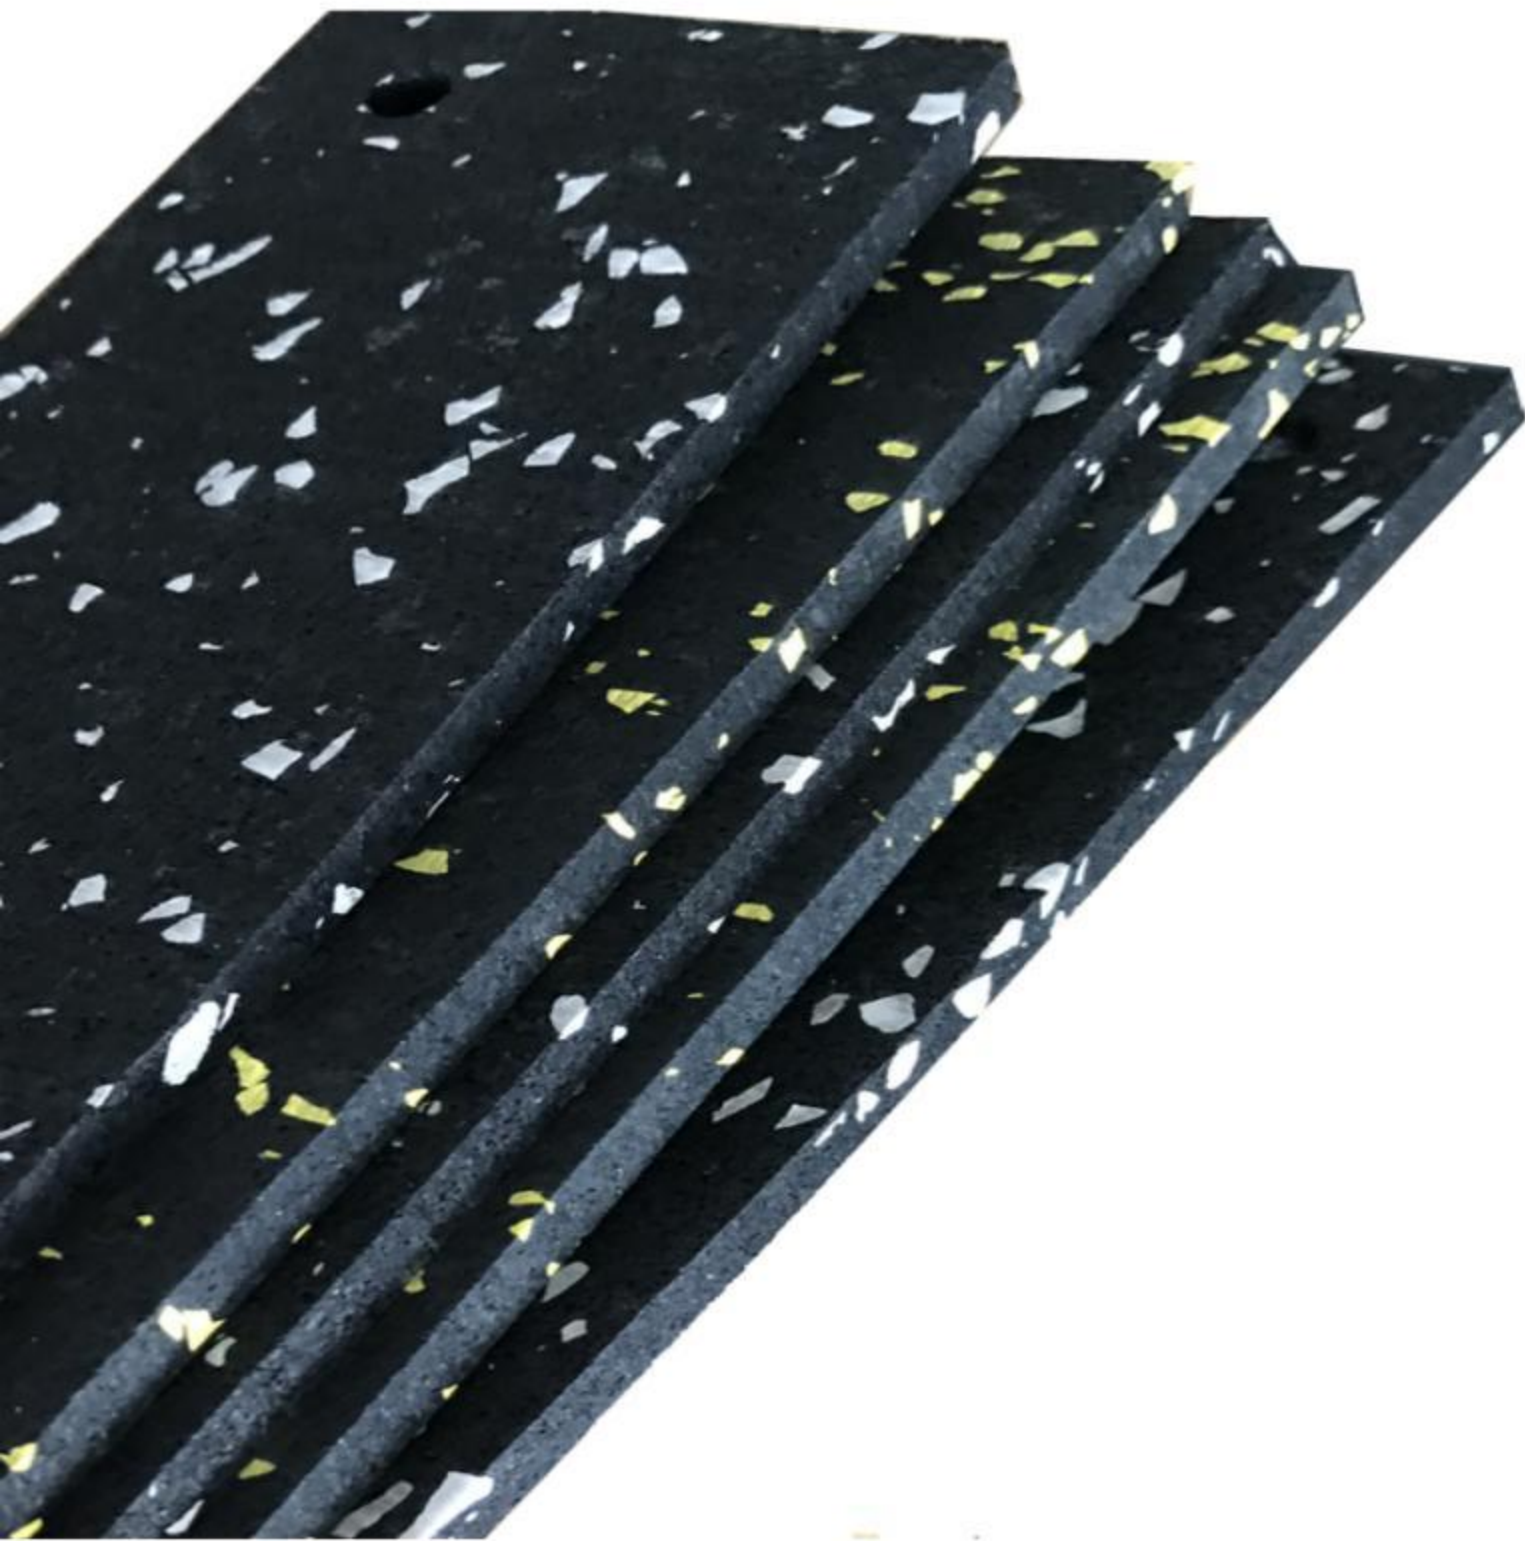

DESCRIPTION

Length (mm)	Width (mm)	Thickness (mm)
10 / 15 / 20	1 / 1.25	4 / 5 / 6 / 7 / 8 / 9 / 10 / 11 / 12

ROLOG

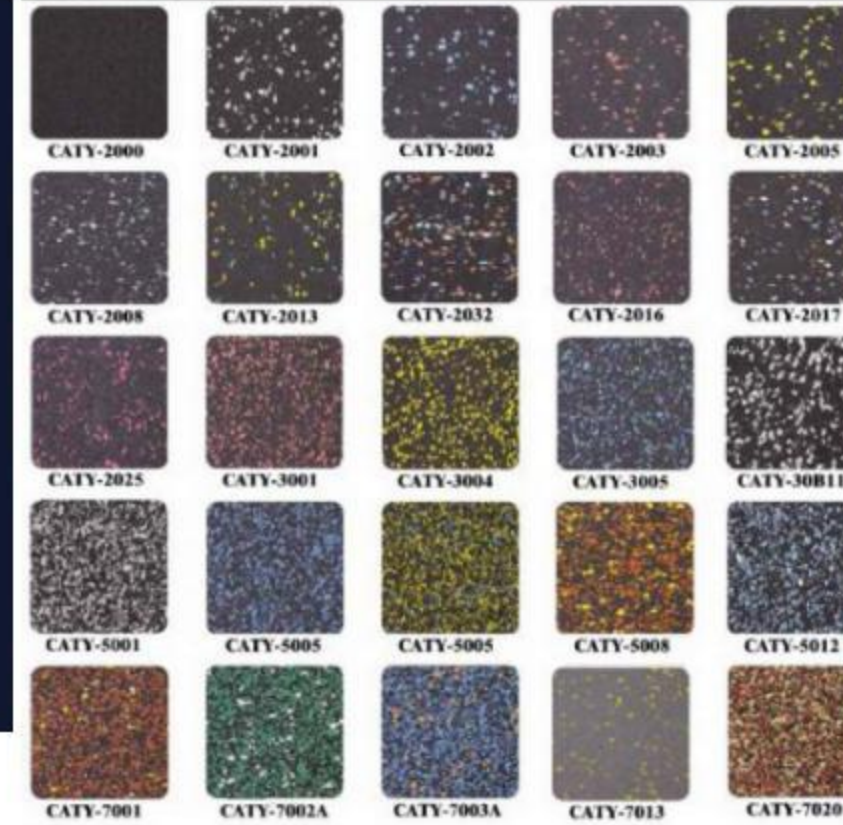

ROLOG



Interlocking Rubber Floor



Hospital



School



Office



Kindergarten



Store




Restaurant



Beadhouse




Other

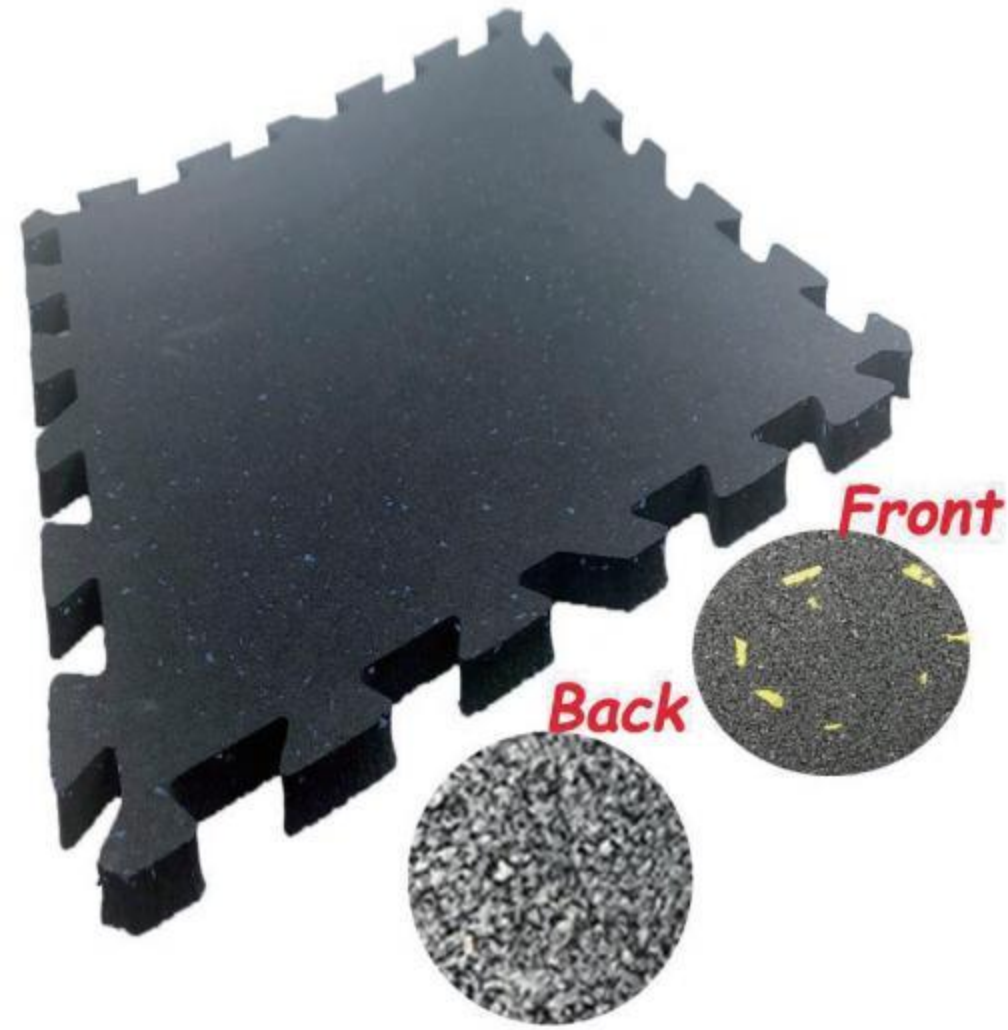


Size: 485*485*15(mm)
970*970*15(mm)
485*485*20(mm)
970*970*20(mm)

Model:RL-CZY501

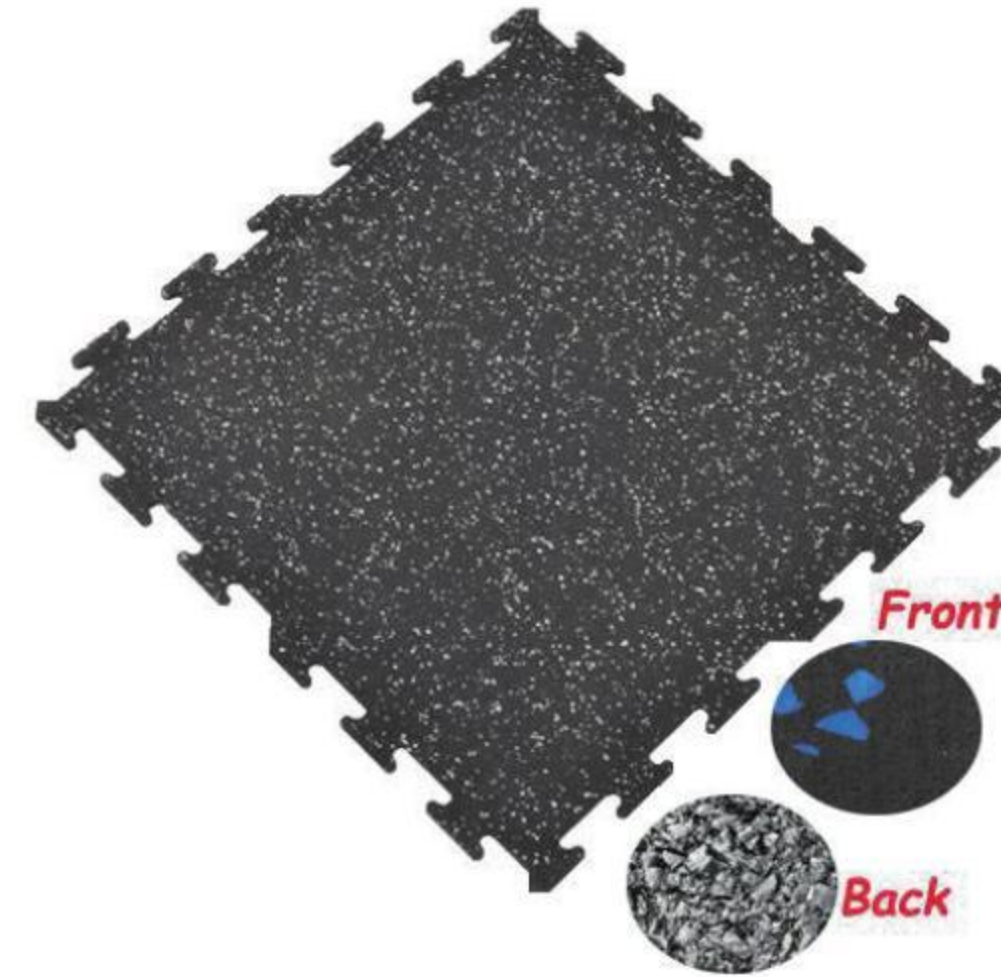


Size: 485*485*15(mm)
970*970*15(mm)
485*485*20(mm)
970*970*20(mm)

Model:RL-CZY503

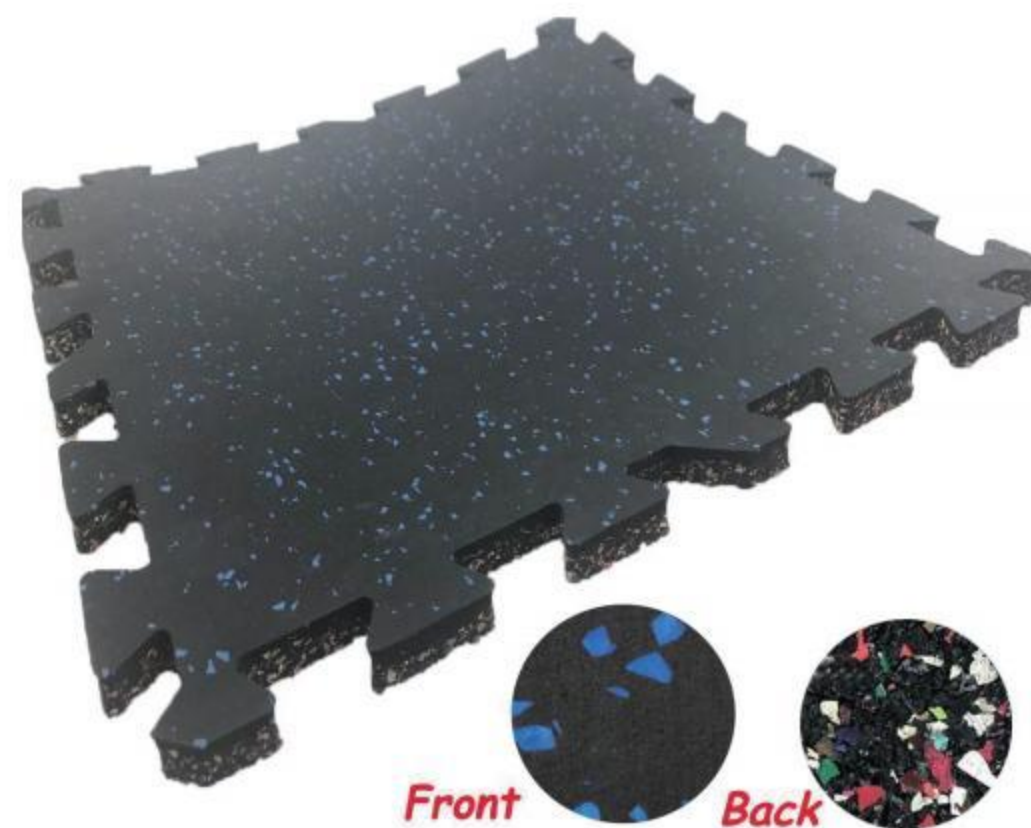

Size: 485*485*15(mm)
970*970*15(mm)
485*485*20(mm)
970*970*20(mm)


Model:RL-CZY502

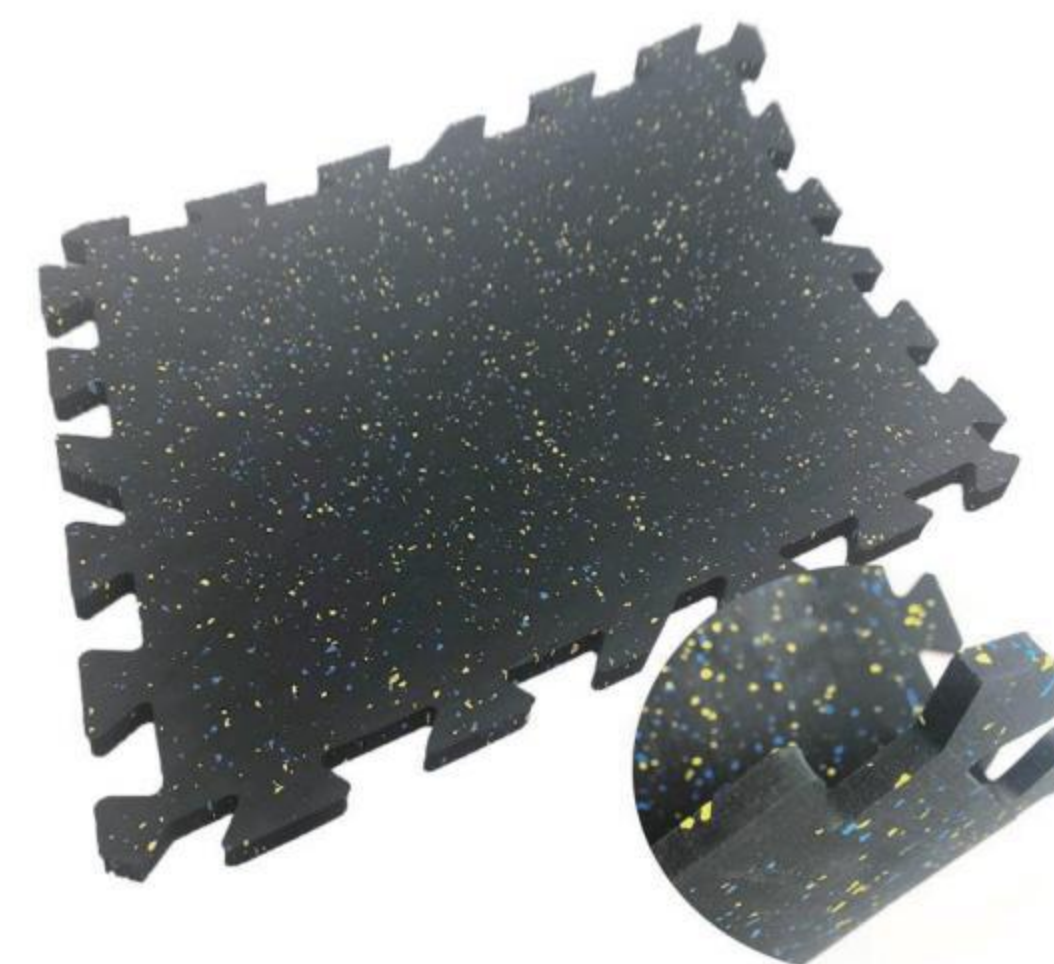

Size: 1030*1030*6~12(mm)

Model:RL-CZY504

Gear Buckle Rubber Tiles

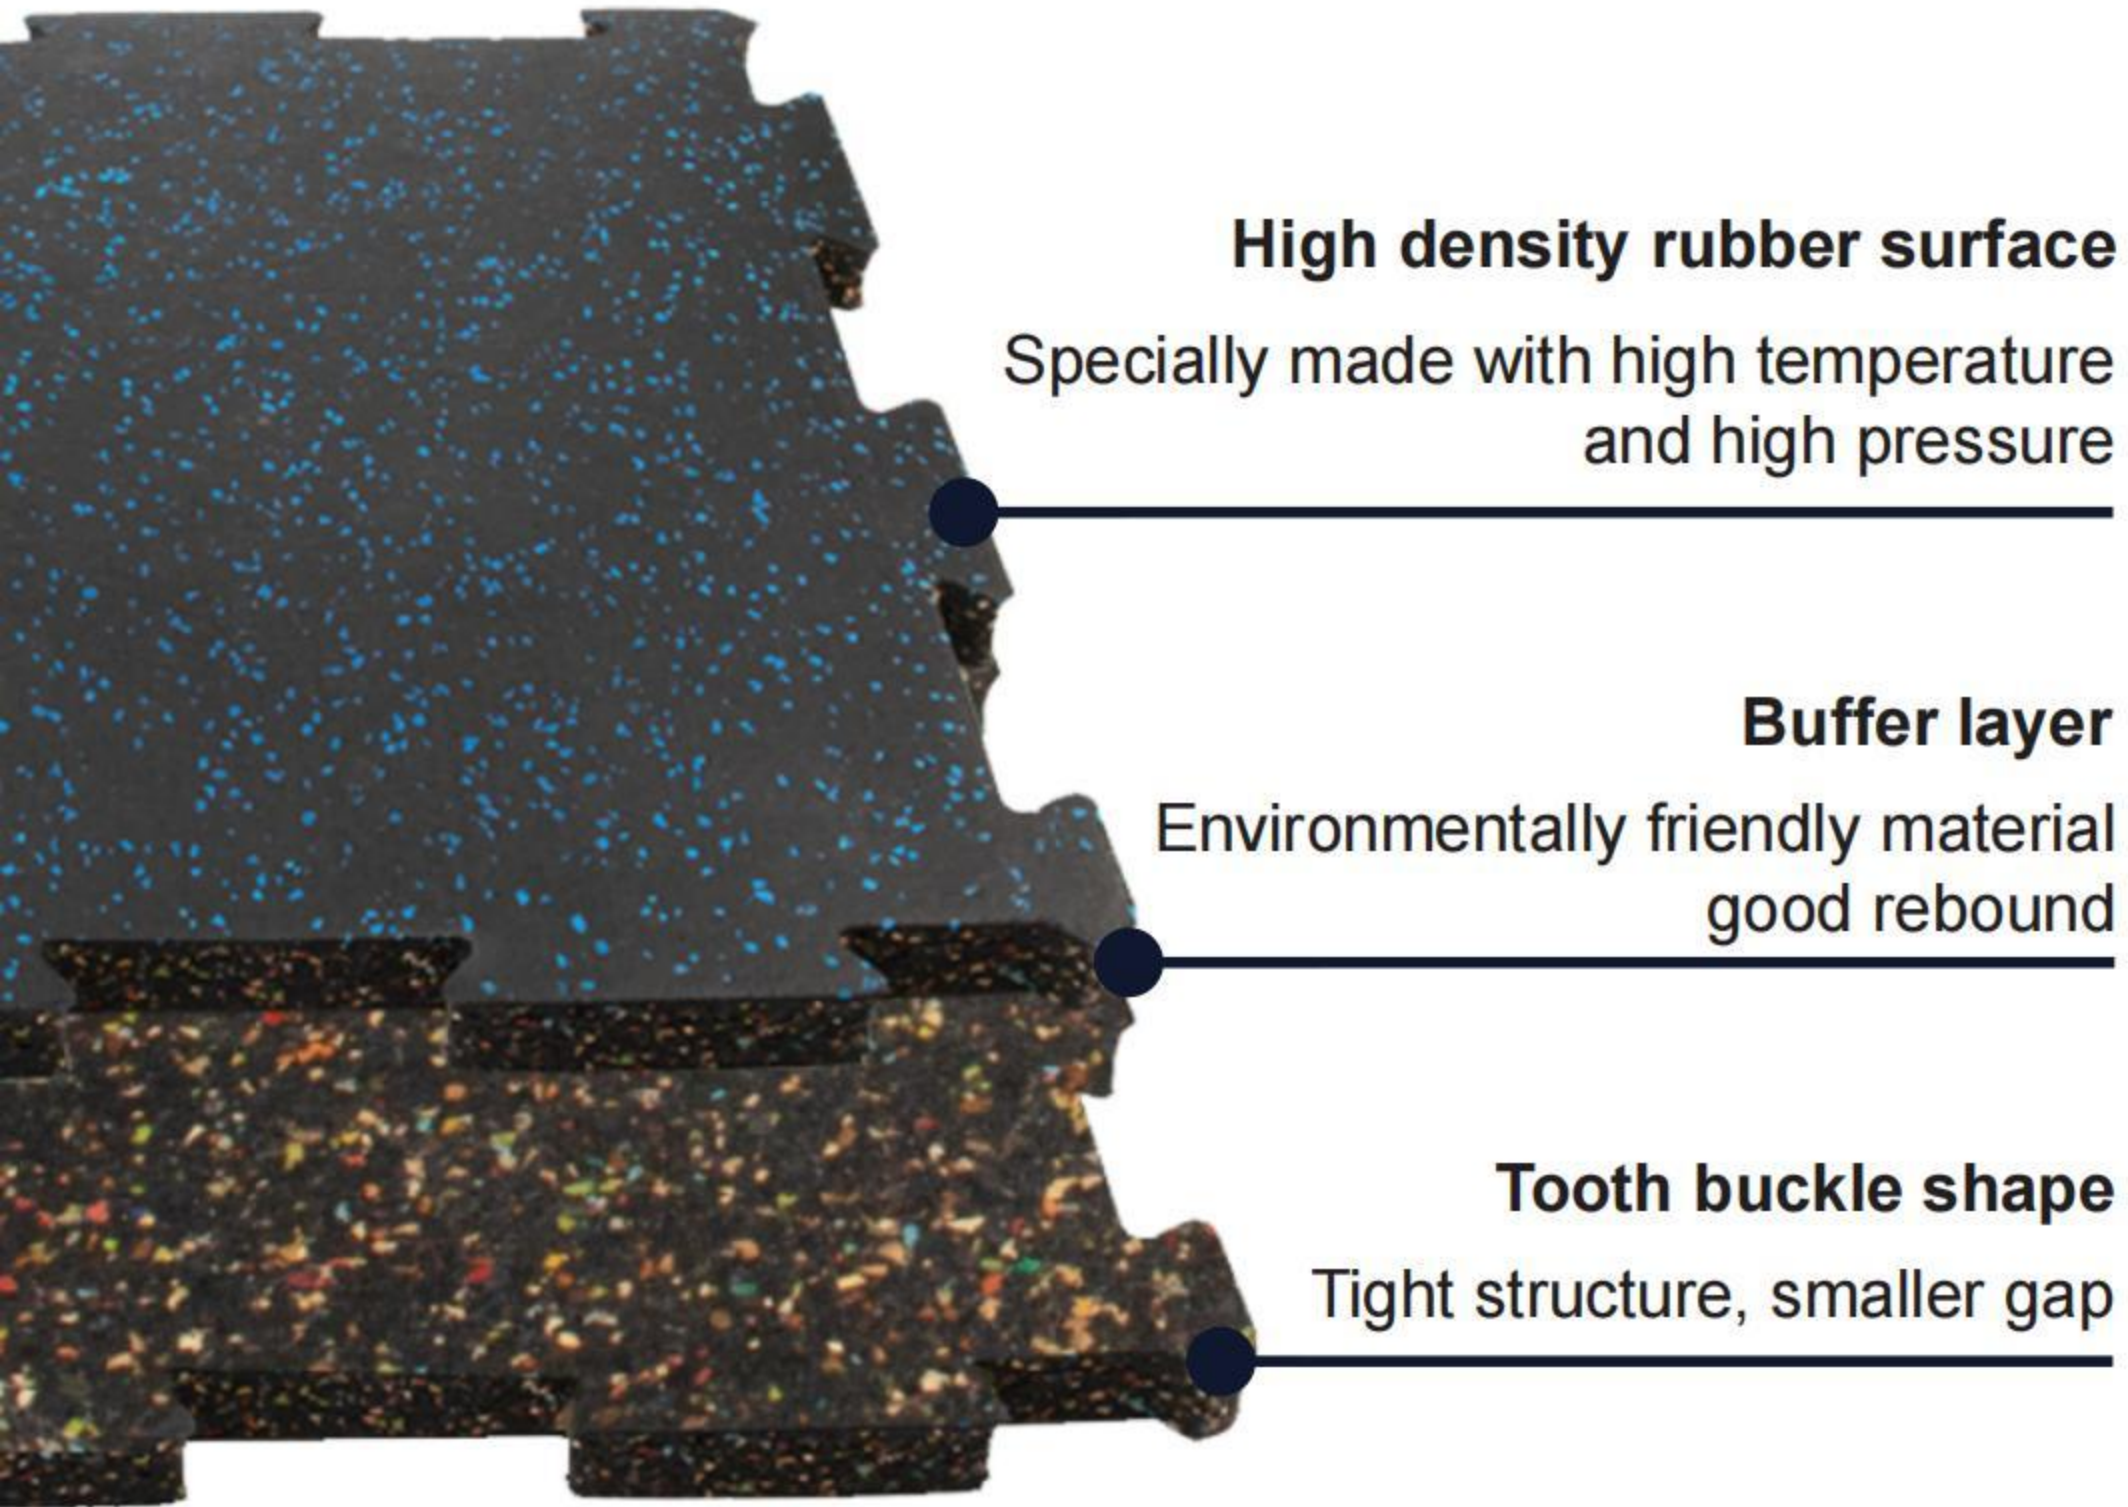

High density rubber surface
Specially made with high temperature and high pressure

Buffer layer
Environmentally friendly material
good rebound

Tooth buckle shape
Tight structure, smaller gap

DESCRIPTION

Length (mm)	Width (mm)	Thickness (mm)
10 / 15 / 20	1 / 1.25	4 / 5 / 6 / 7 / 8 / 9 / 10 / 11 / 12



Buckle Rubber Tiles



Hospital



School



Office



Kindergarten



Store




Restaurant




Beadhouse




Other

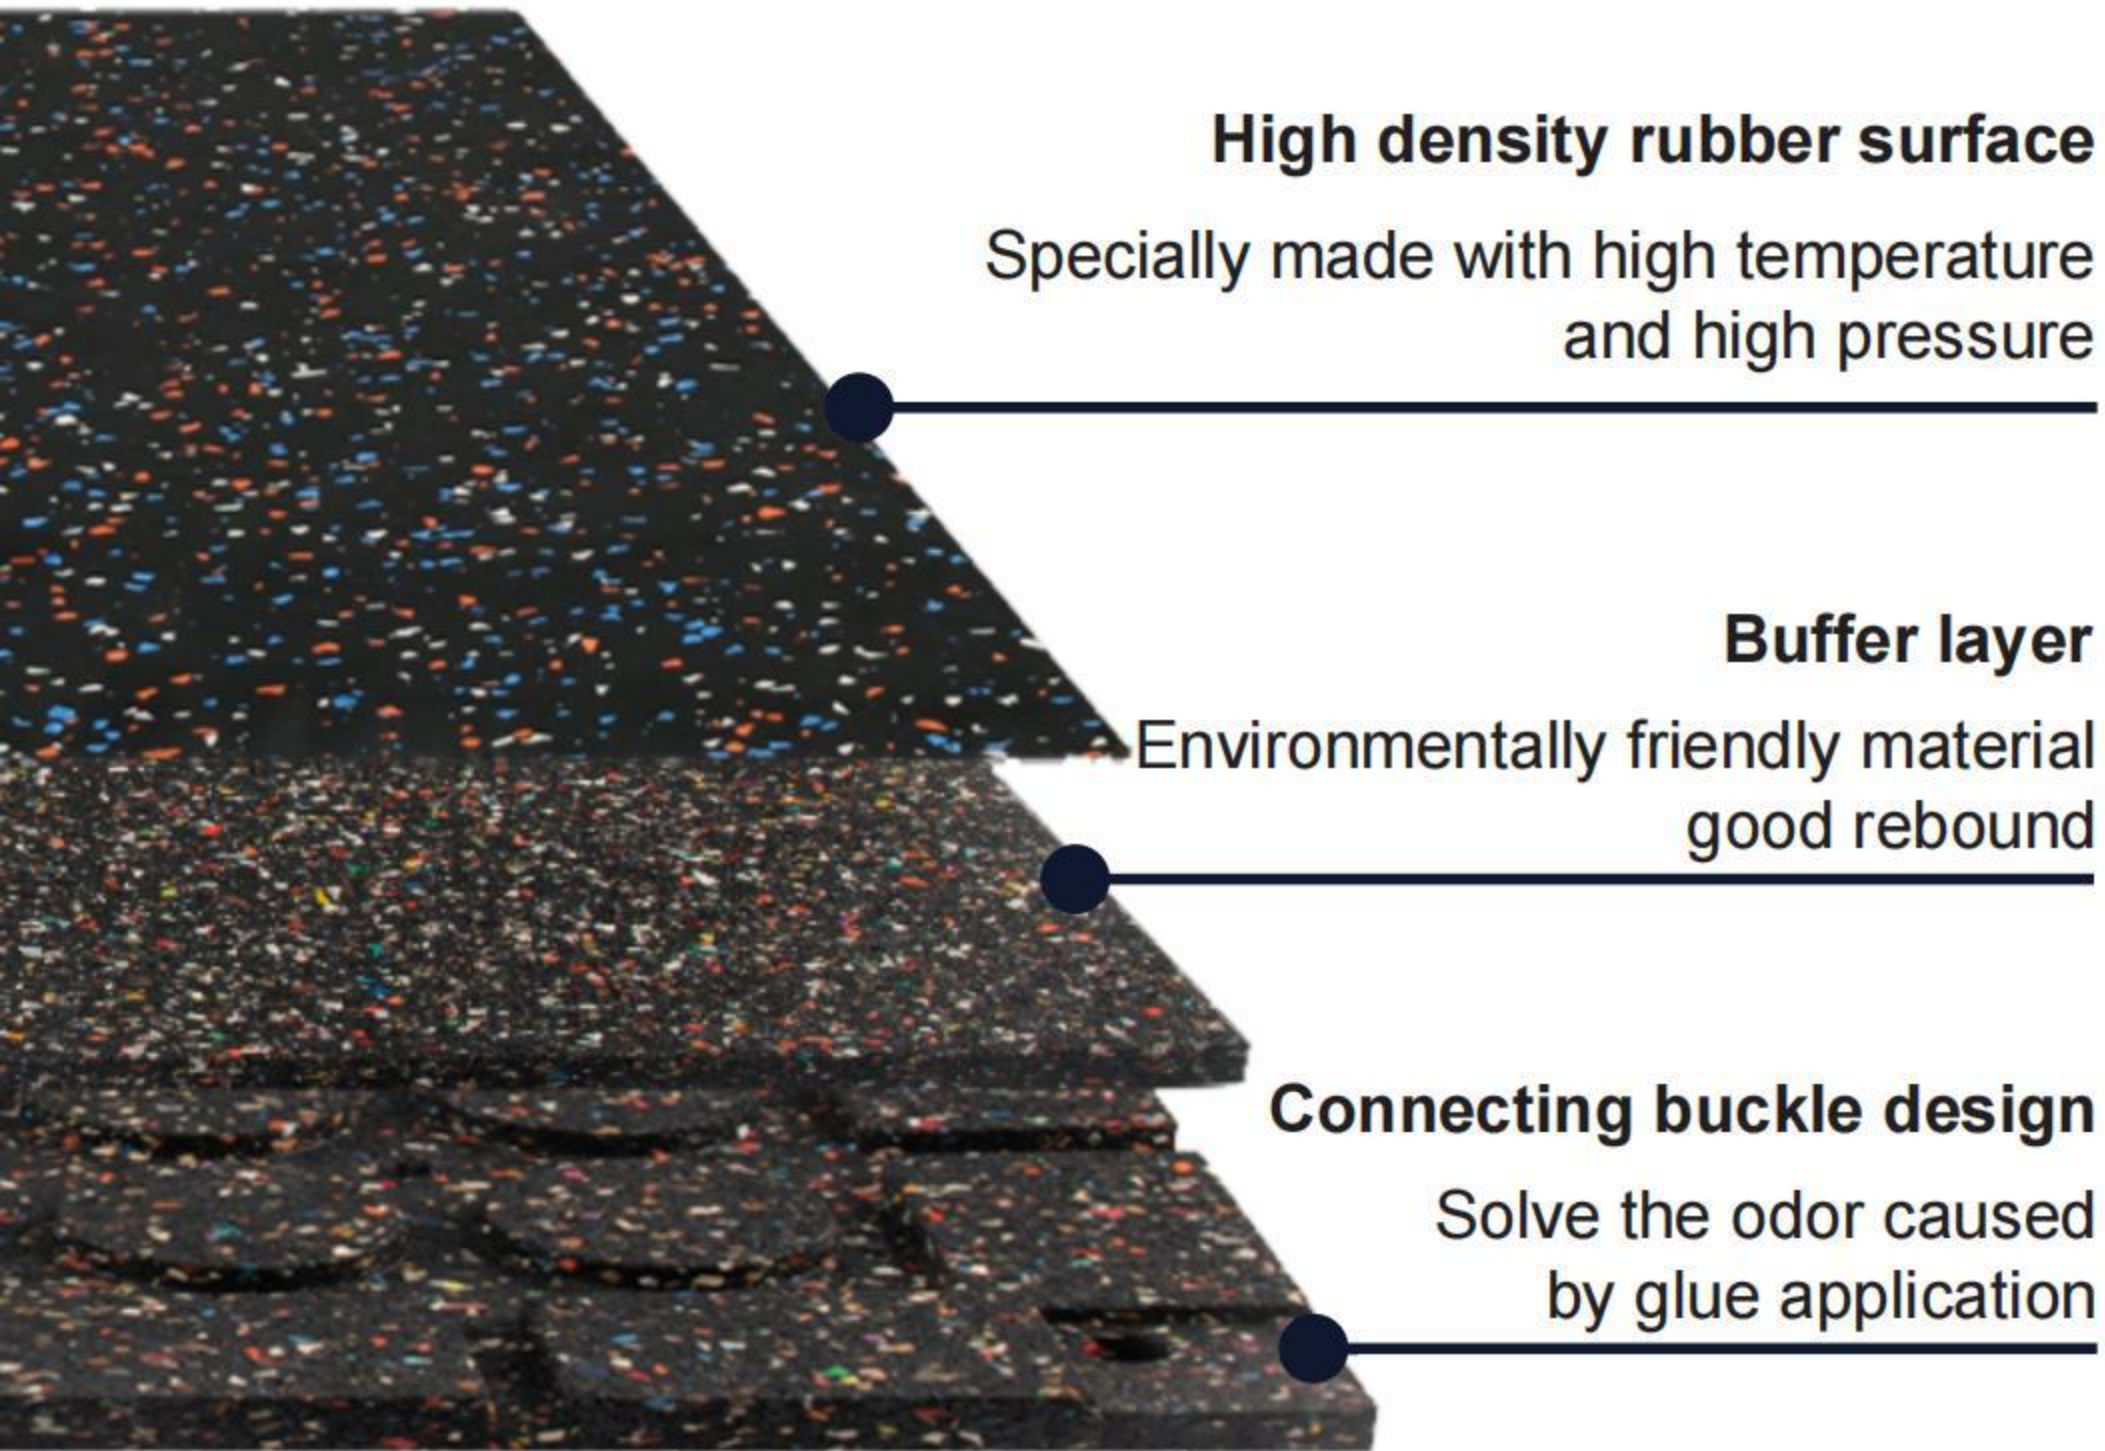

DESCRIPTION	Size (mm)	Thickness (mm)
	500*500	15 / 20 / 25 / 30 / 35 / 40 / 45 / 50
	1000*500	15 / 20 / 25 / 30 / 35 / 40 / 45 / 50
	1000*1000	15 / 20 / 25 / 30 / 35

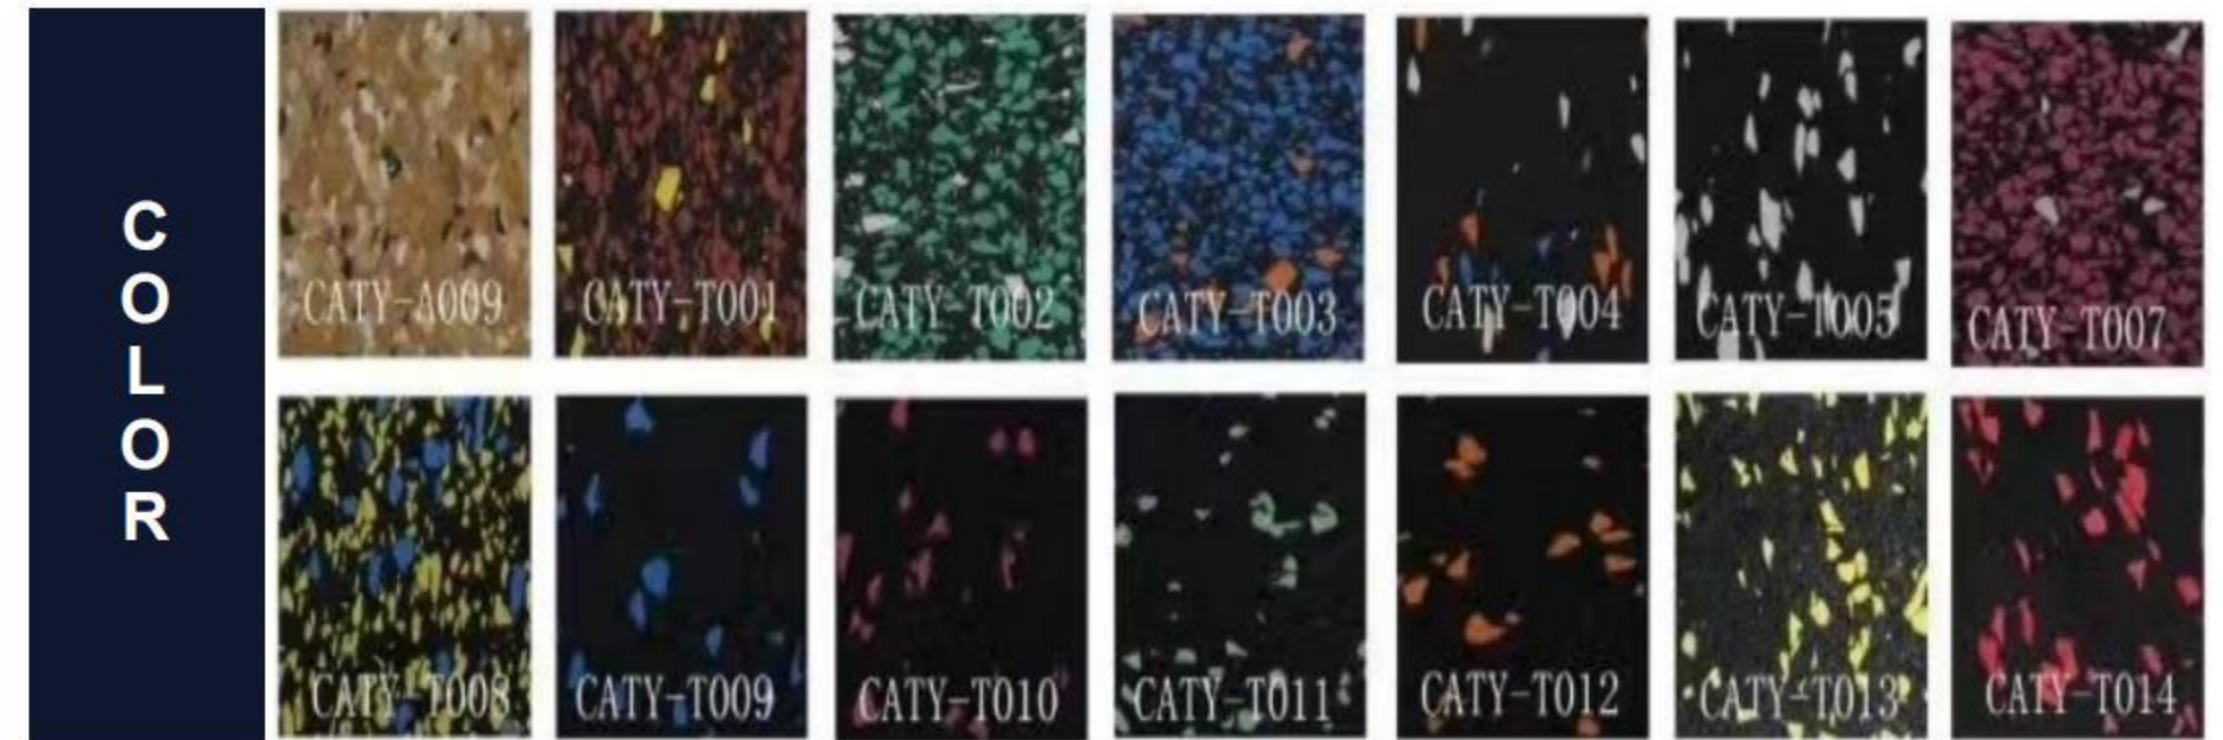



Interlocking

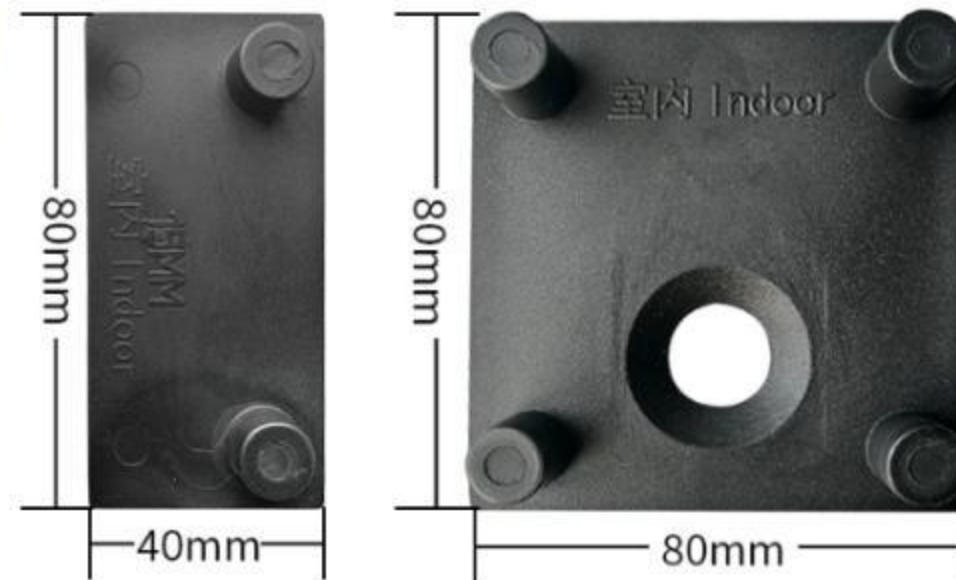

Composite EPDM Rubber Flooring Tiles



Model:RL-CZY301


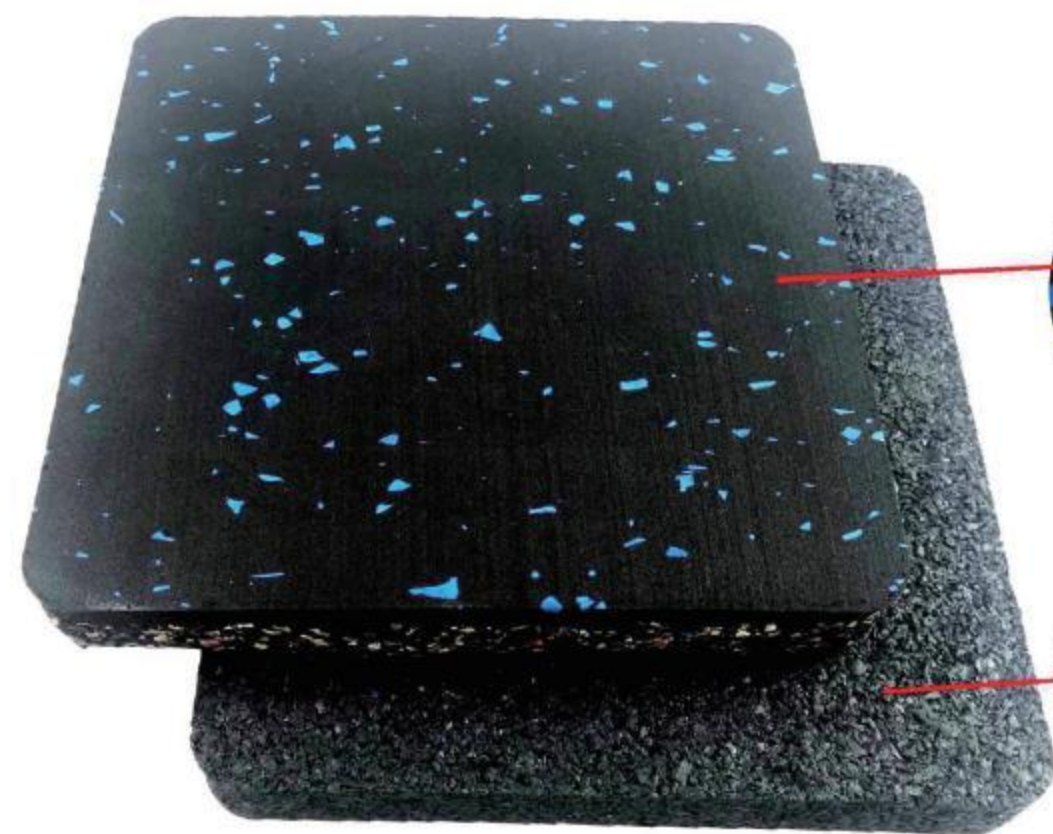


Surface: 1.5mm thick
 Material: Rubber + colorful EPDM
 Color: Red / Yellow / Blue /
 Green / Grey / Black




Bottom :
 Material: 8~10 mesh / 14~16 mesh
 rubber particles
 Color: Black

Model:RL-CZY302

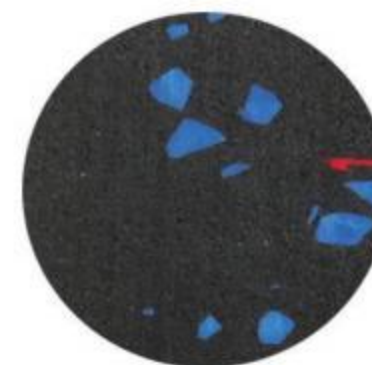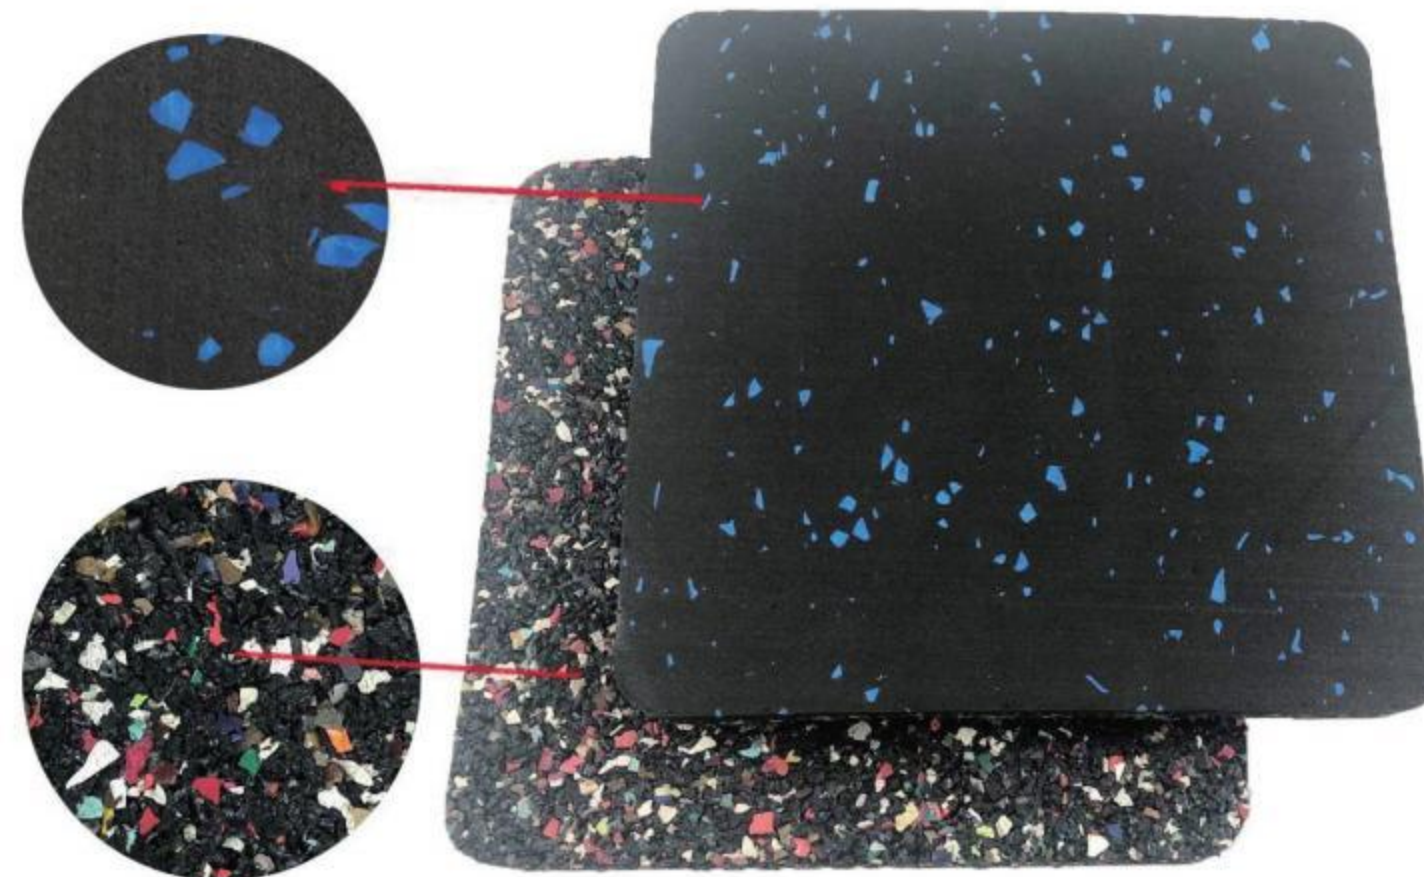

Model	Size (mm)	Thickness (mm)	Work Temperature	Color Option	
CZY-300	500*500	15	- 40°C~100°C		
		20			
		25			
		30			
		40			
		50			
	1000*1000	15			
		20			
		25			
		30			

Multifunctional Rubber Flooring Tiles

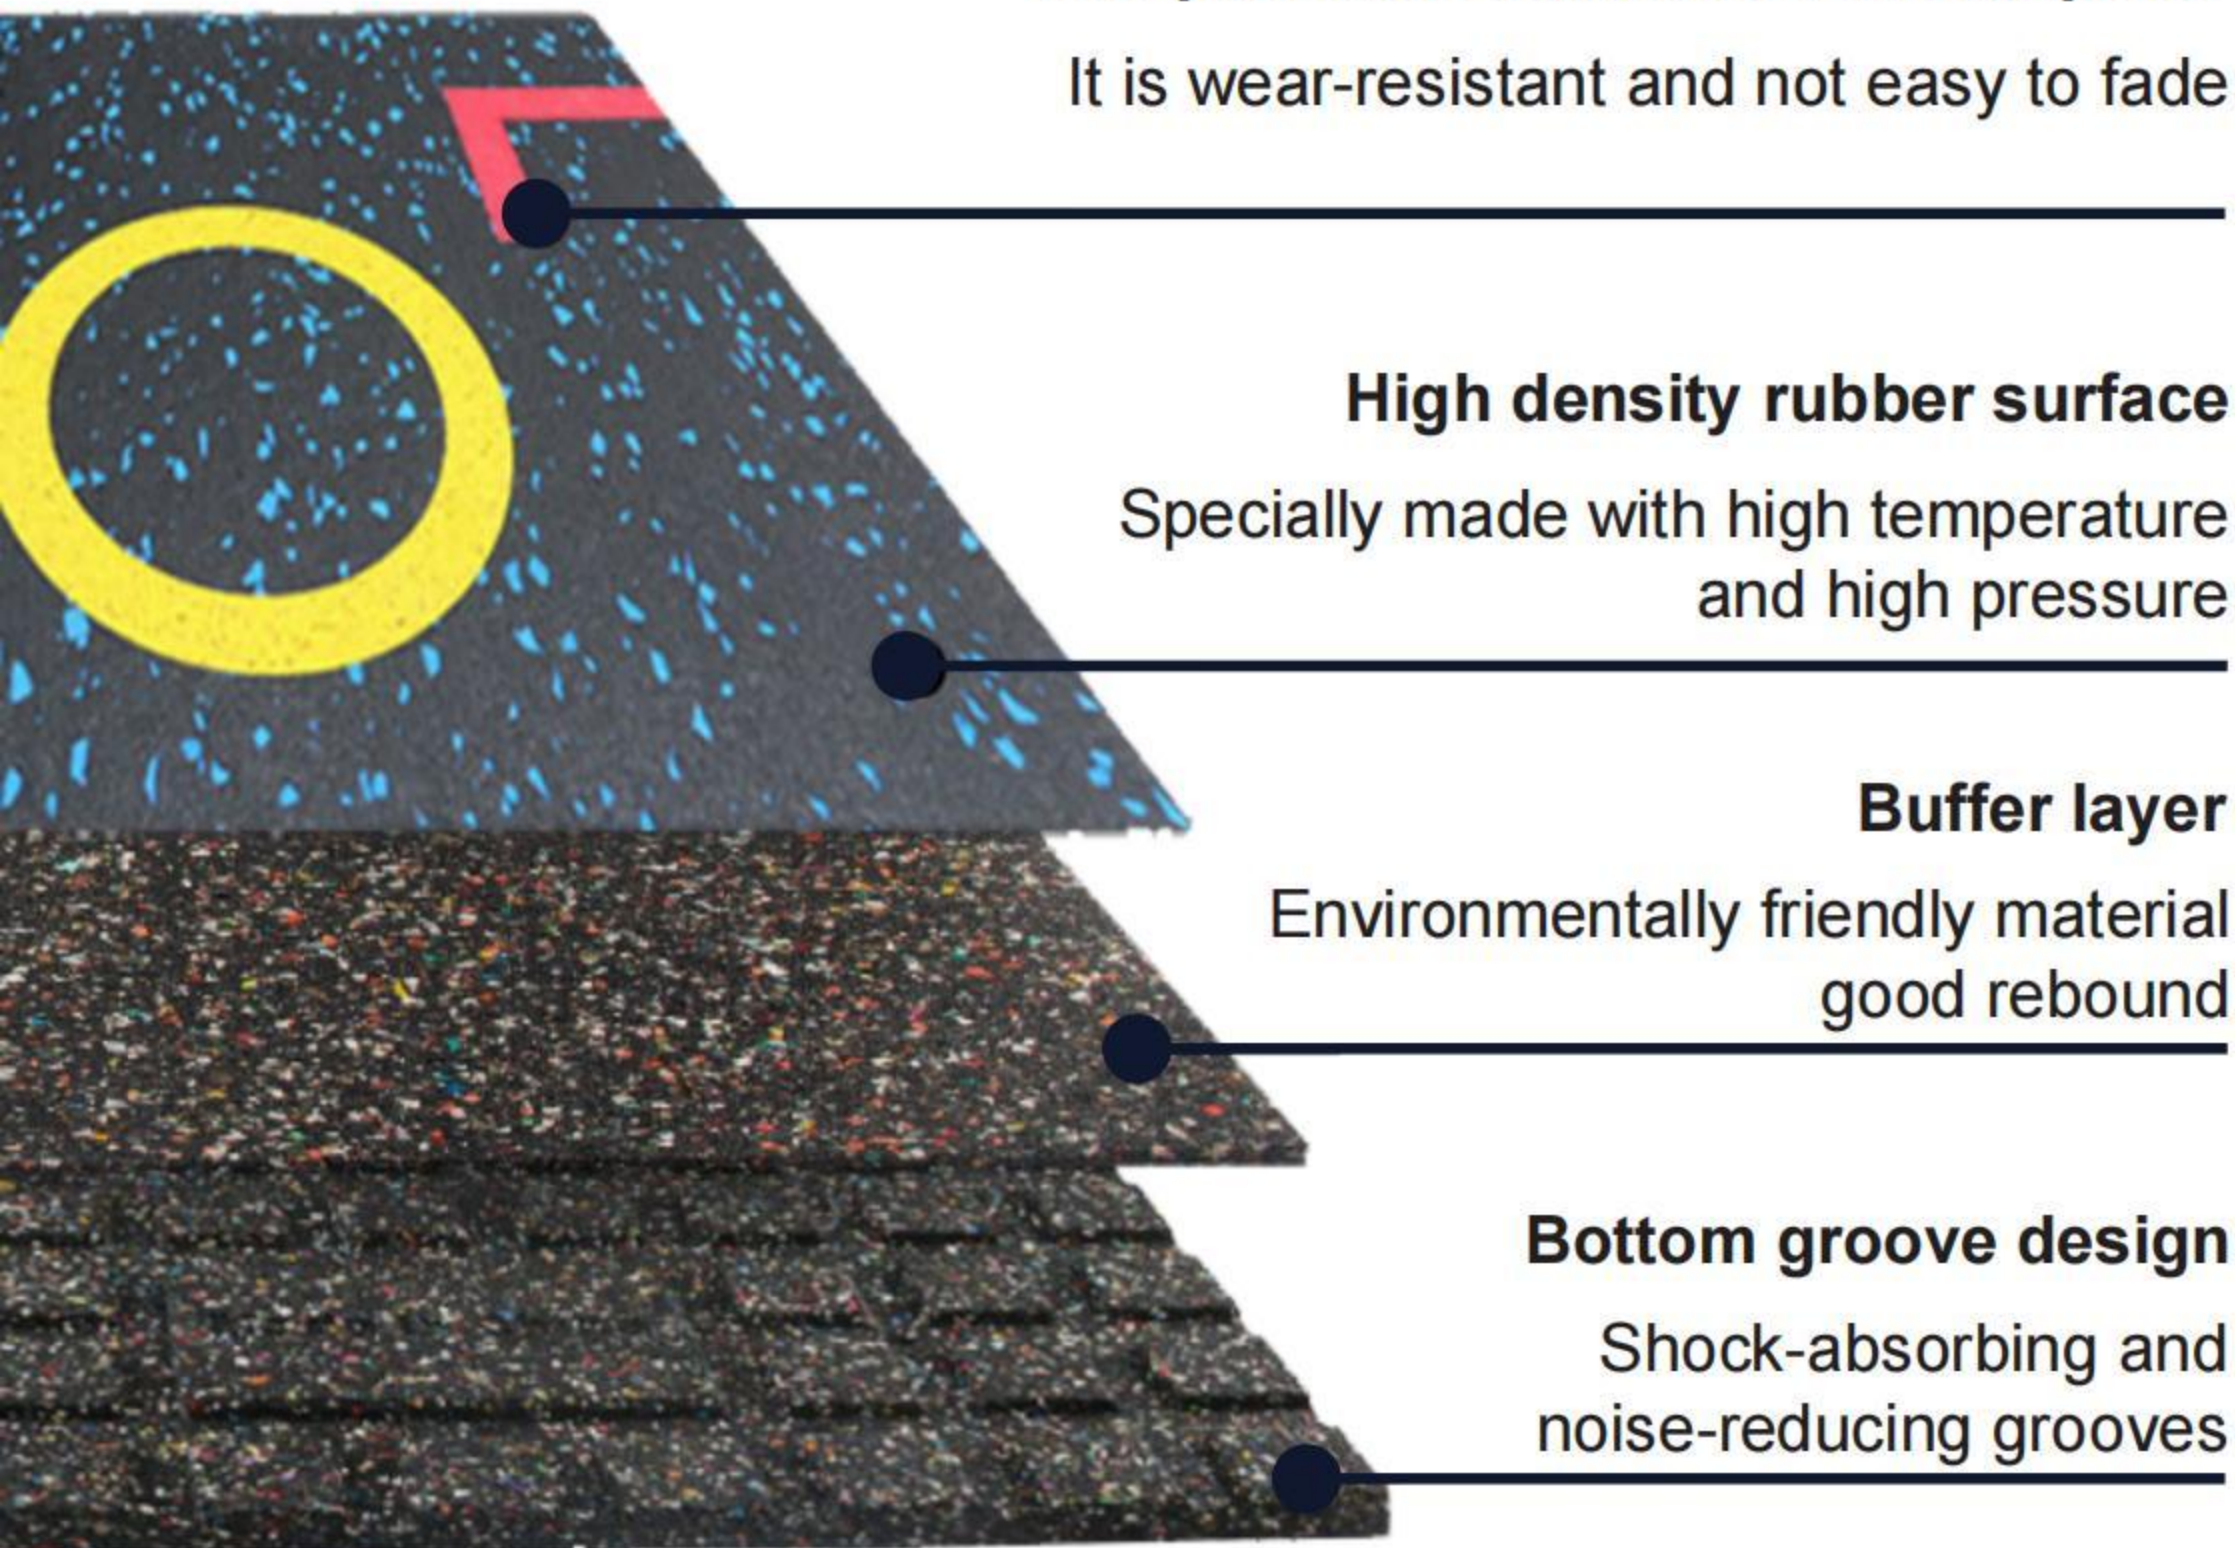

DESCRIPTION	Size (mm)	Thickness (mm)
	500*500	15 / 20 / 25 / 30 / 35 / 40 / 45 / 50
	1000*500	15 / 20 / 25 / 30 / 35 / 40 / 45 / 50
	1000*1000	15 / 20 / 25 / 30 / 35



Multifunctional Rubber Flooring Tiles



Hospital



School



Office



Kindergarten



Store



Restaurant




Beadhouse




Other

单个

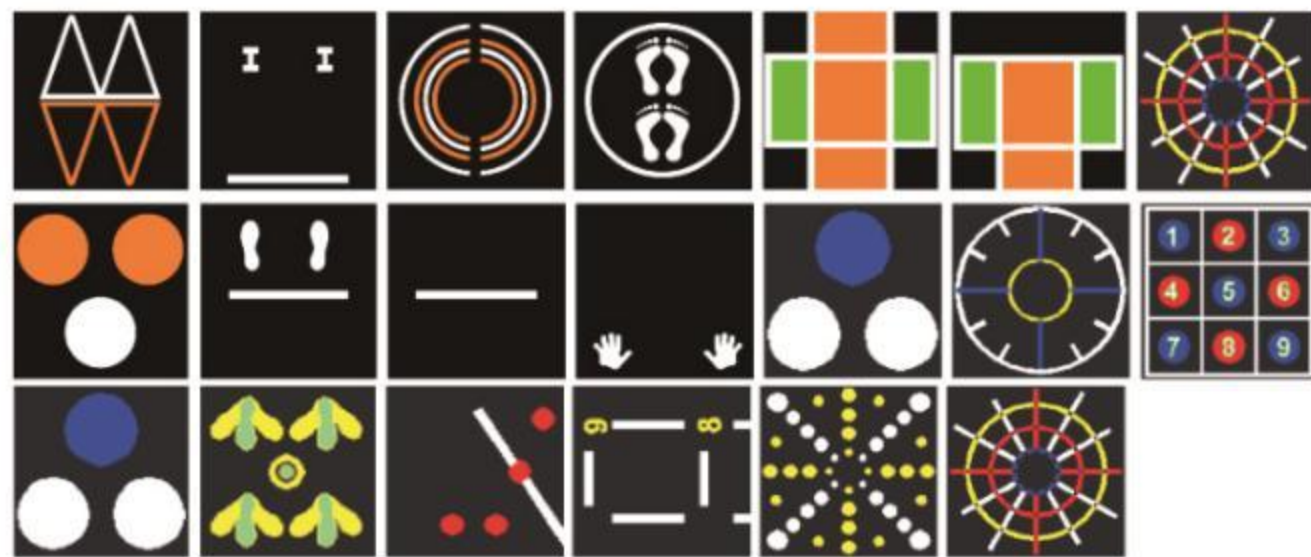


双个

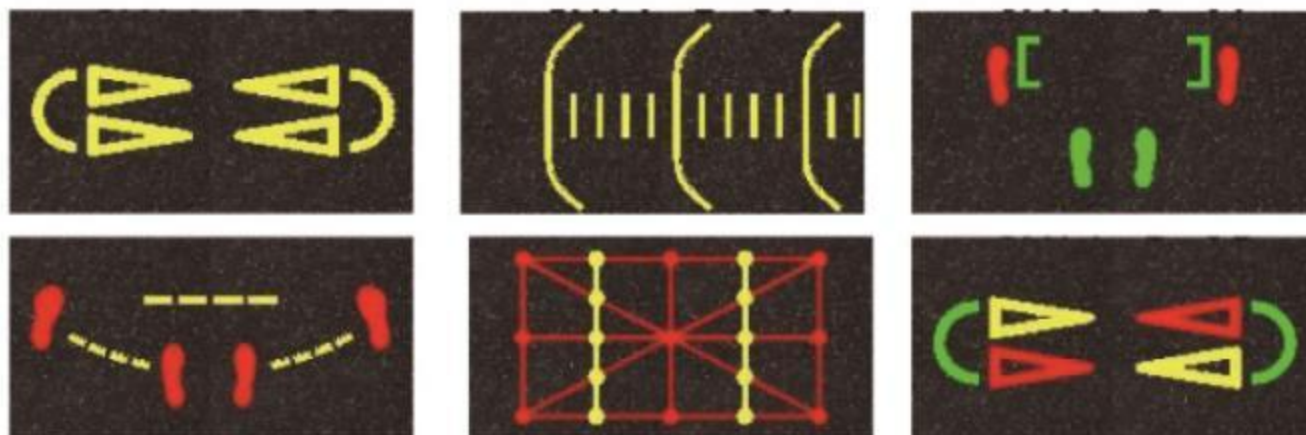


三个




四个

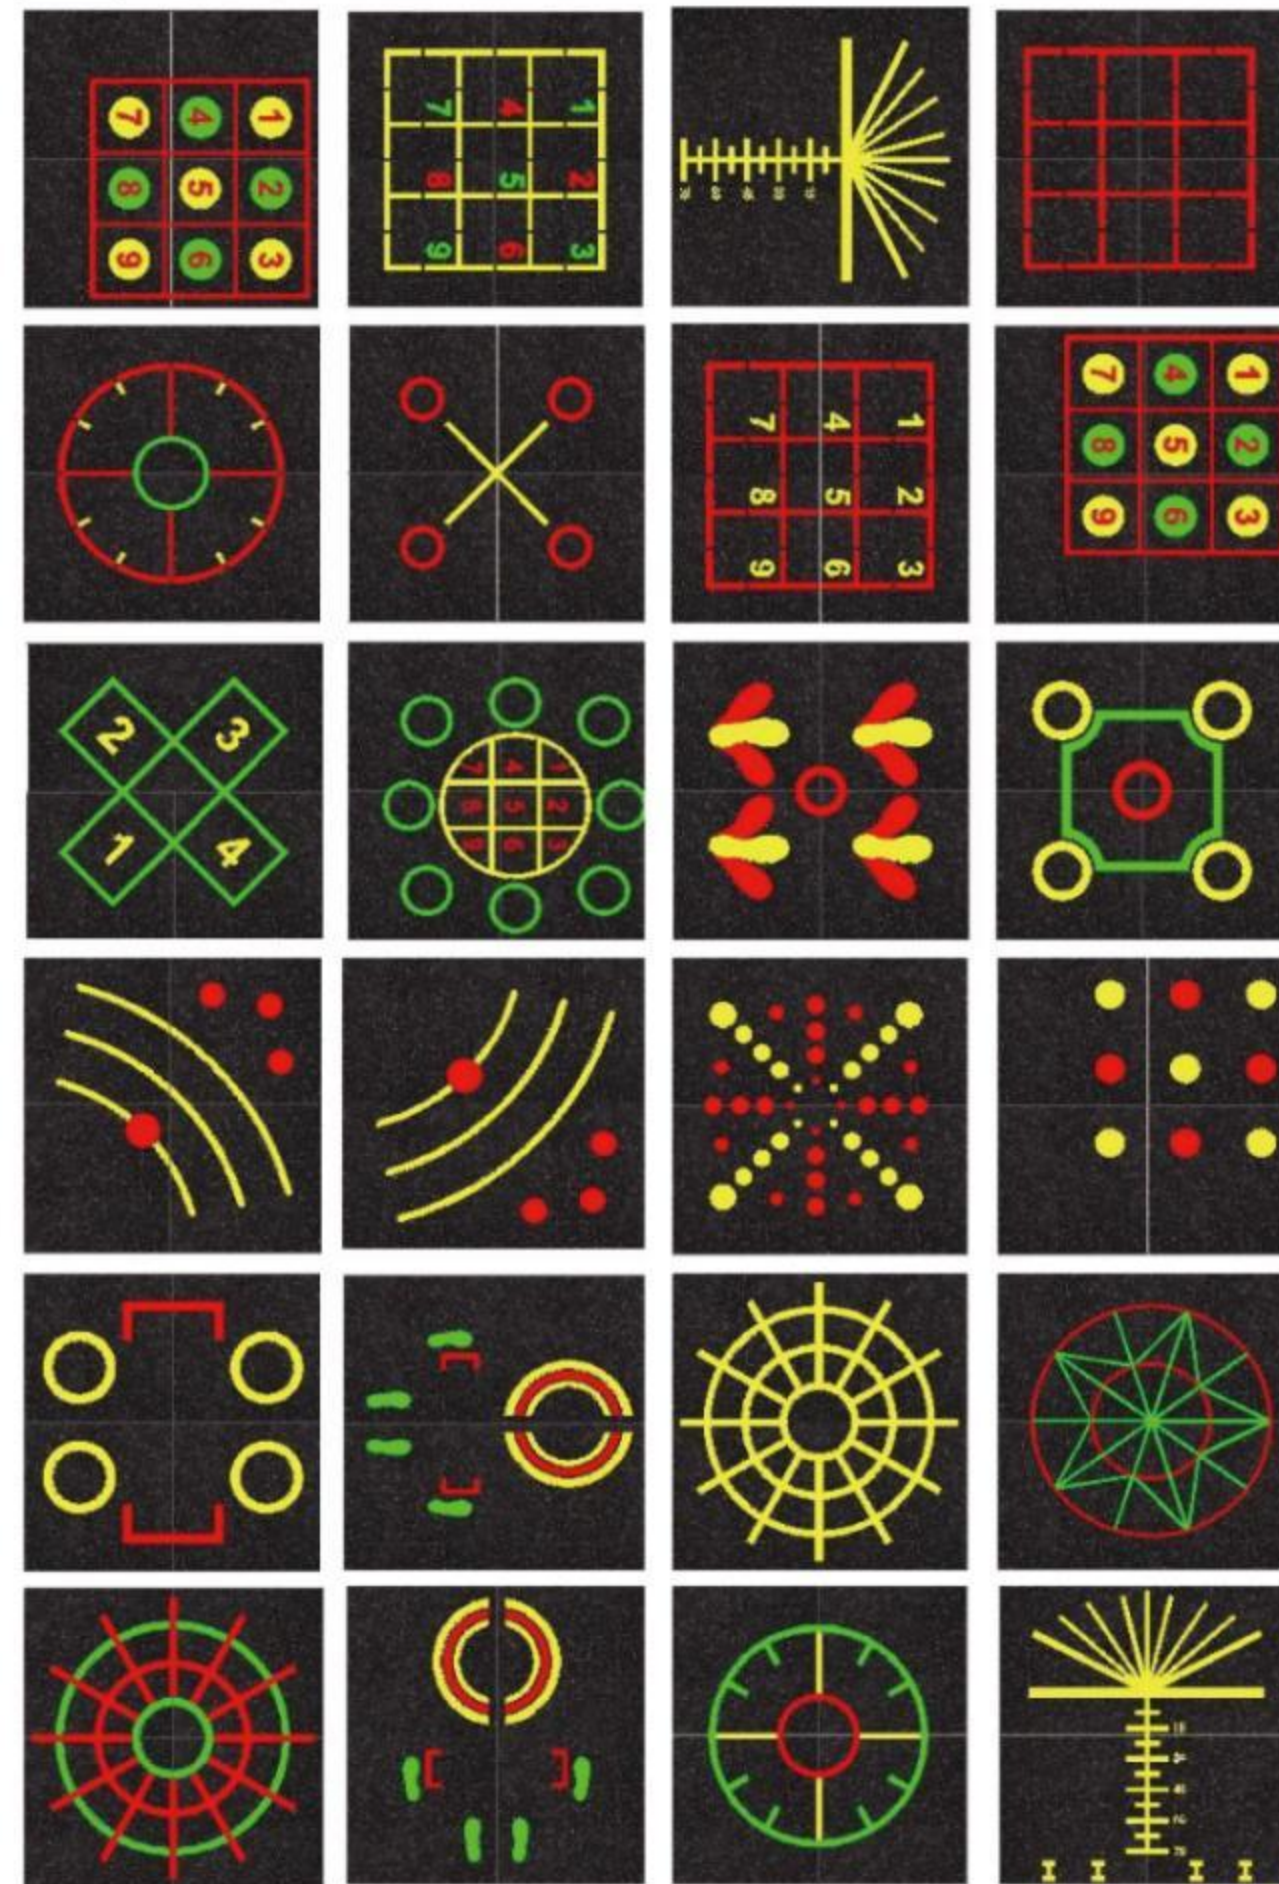

多个

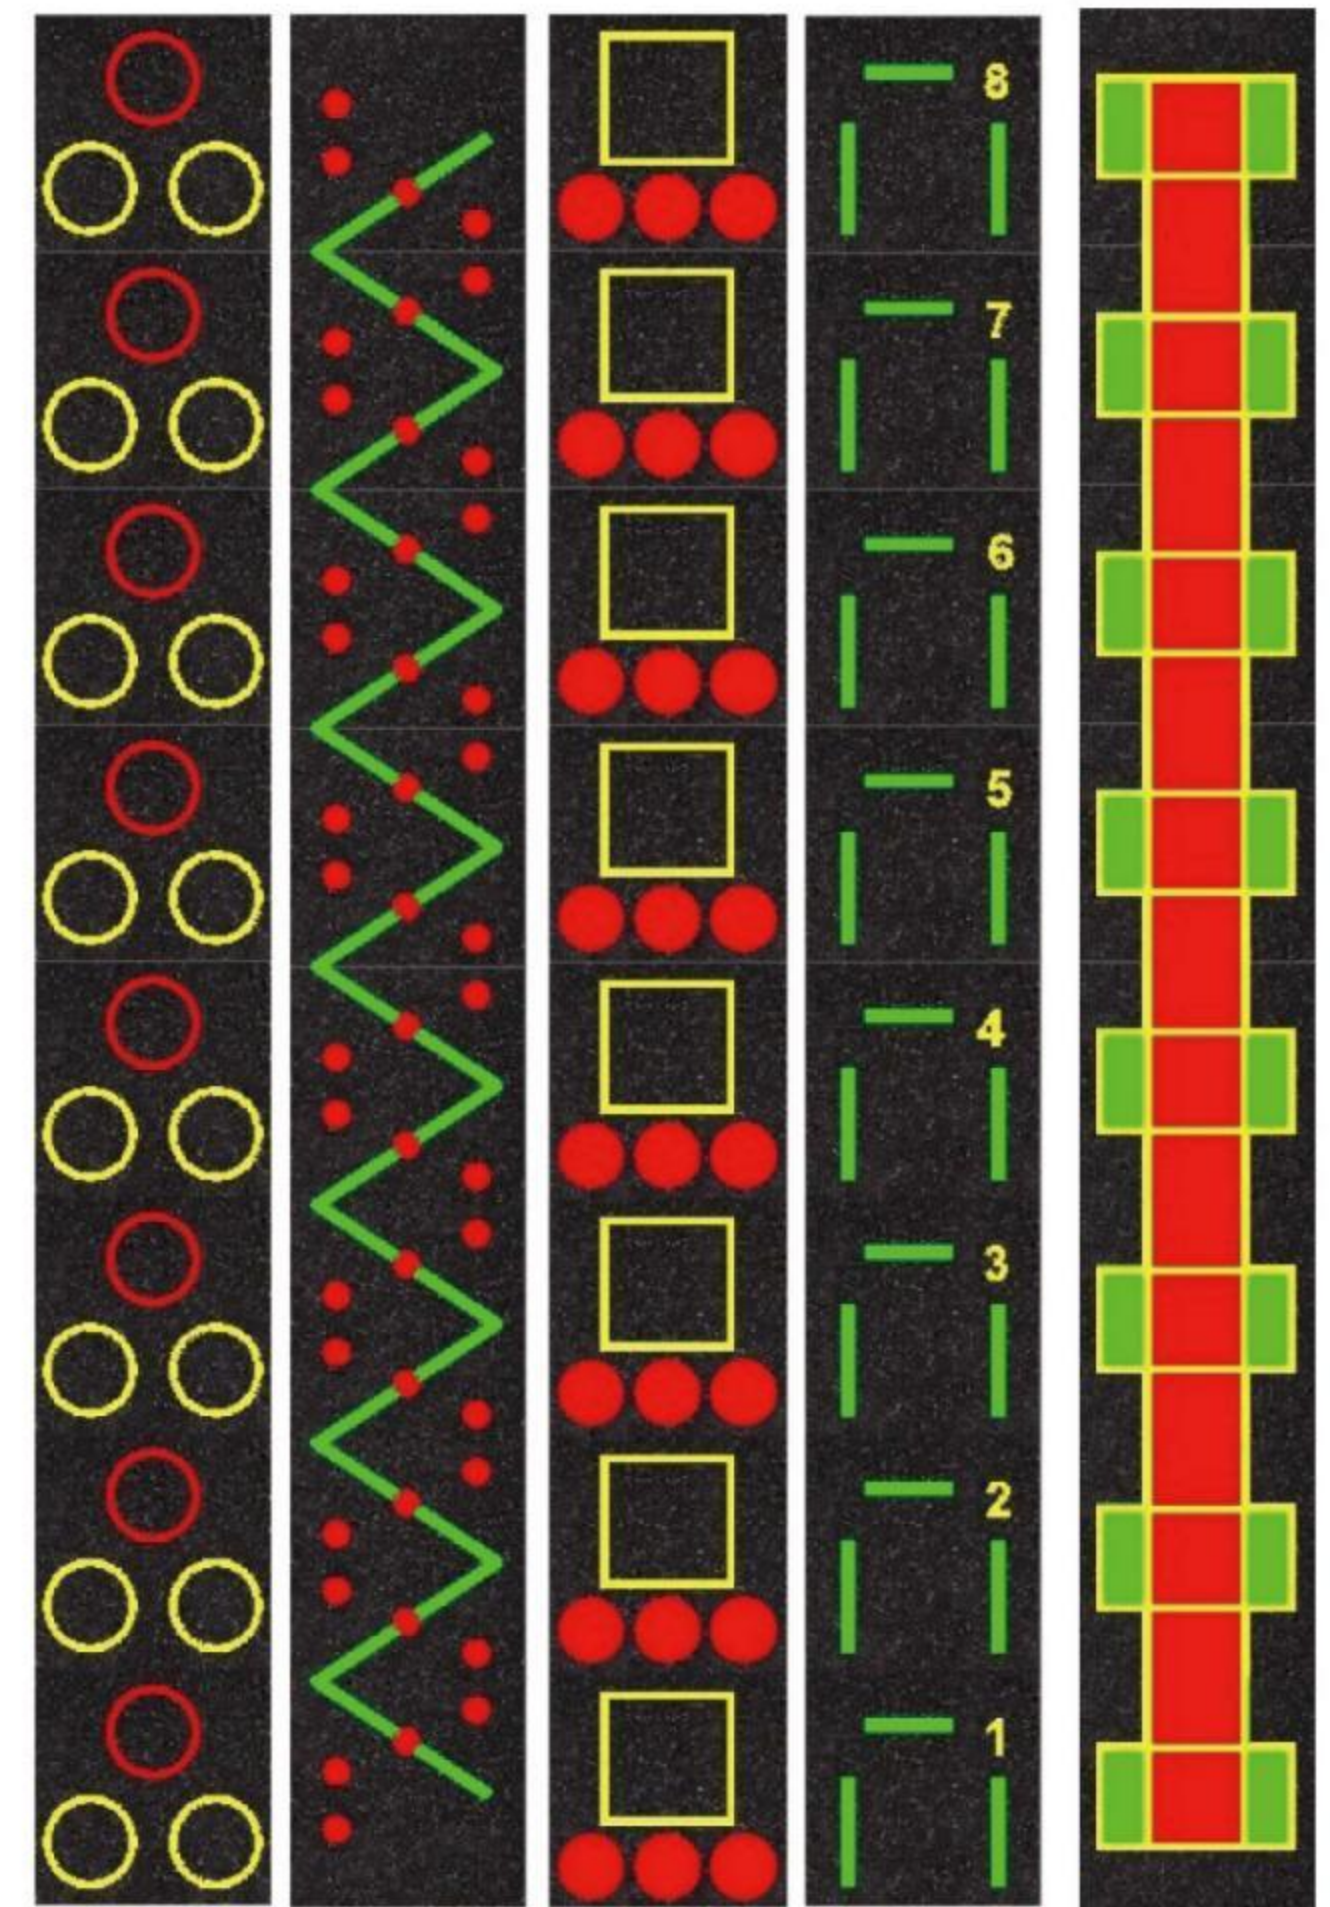

I-shaped Rubber Flooring Tiles

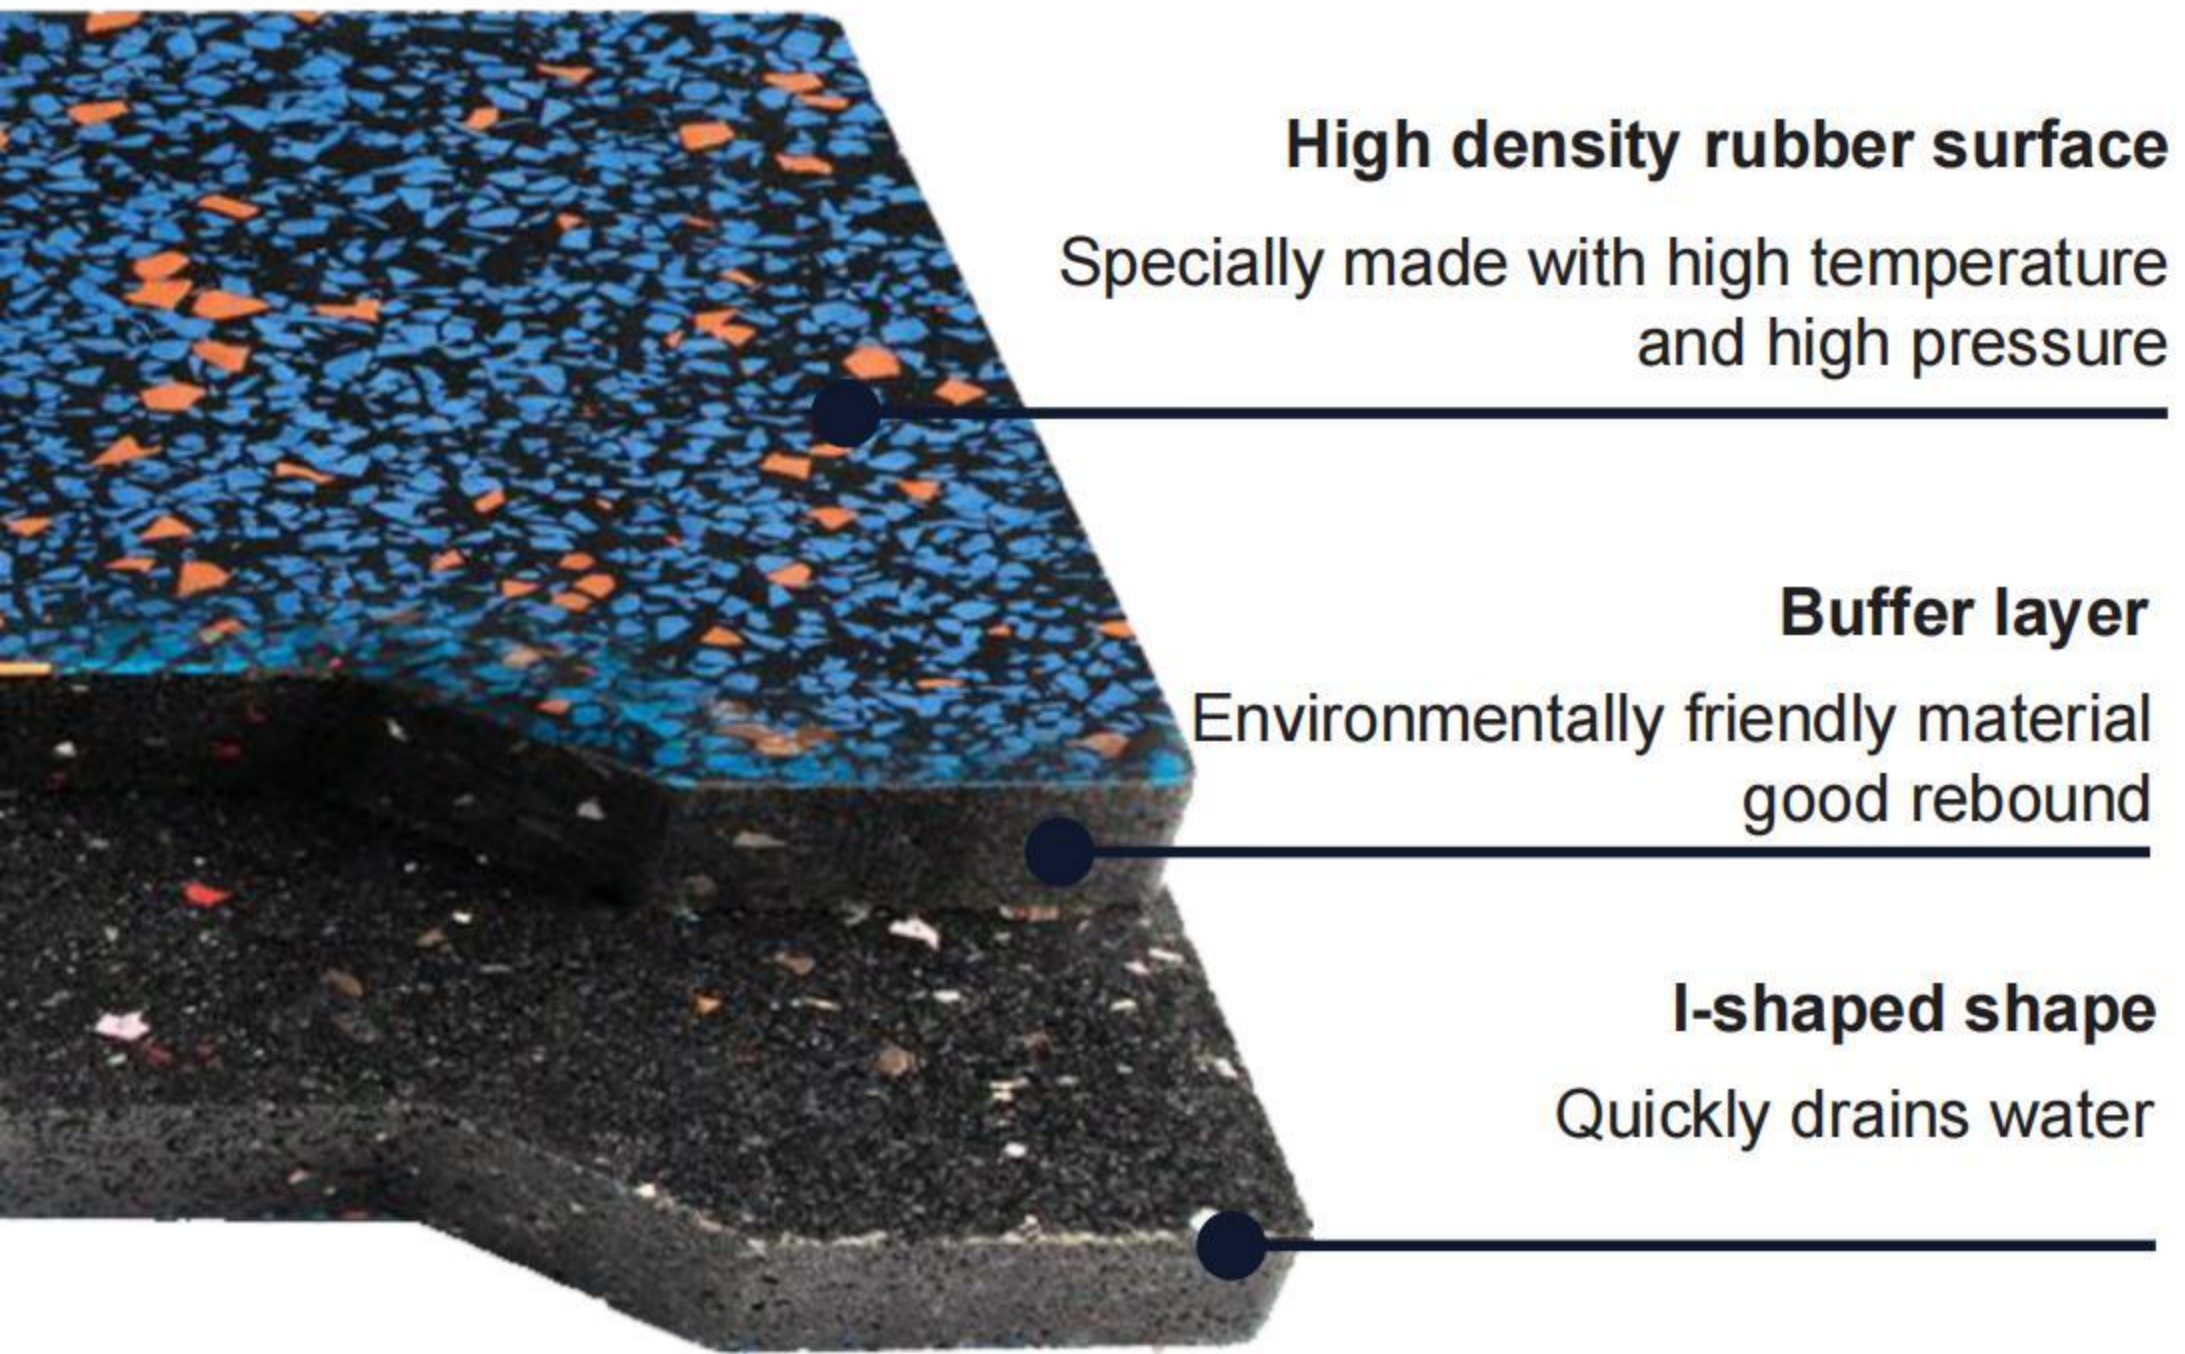

High density rubber surface
Specially made with high temperature and high pressure

Buffer layer
Environmentally friendly material
good rebound


I-shaped shape
Quickly drains water

DESCRIPTION

Length (mm)	Width (mm)	Thickness (mm)
10 / 15 / 20	1 / 1.25	4 / 5 / 6 / 7 / 8 / 9 / 10 / 11 / 12



SBR Rubber Flooring Tiles

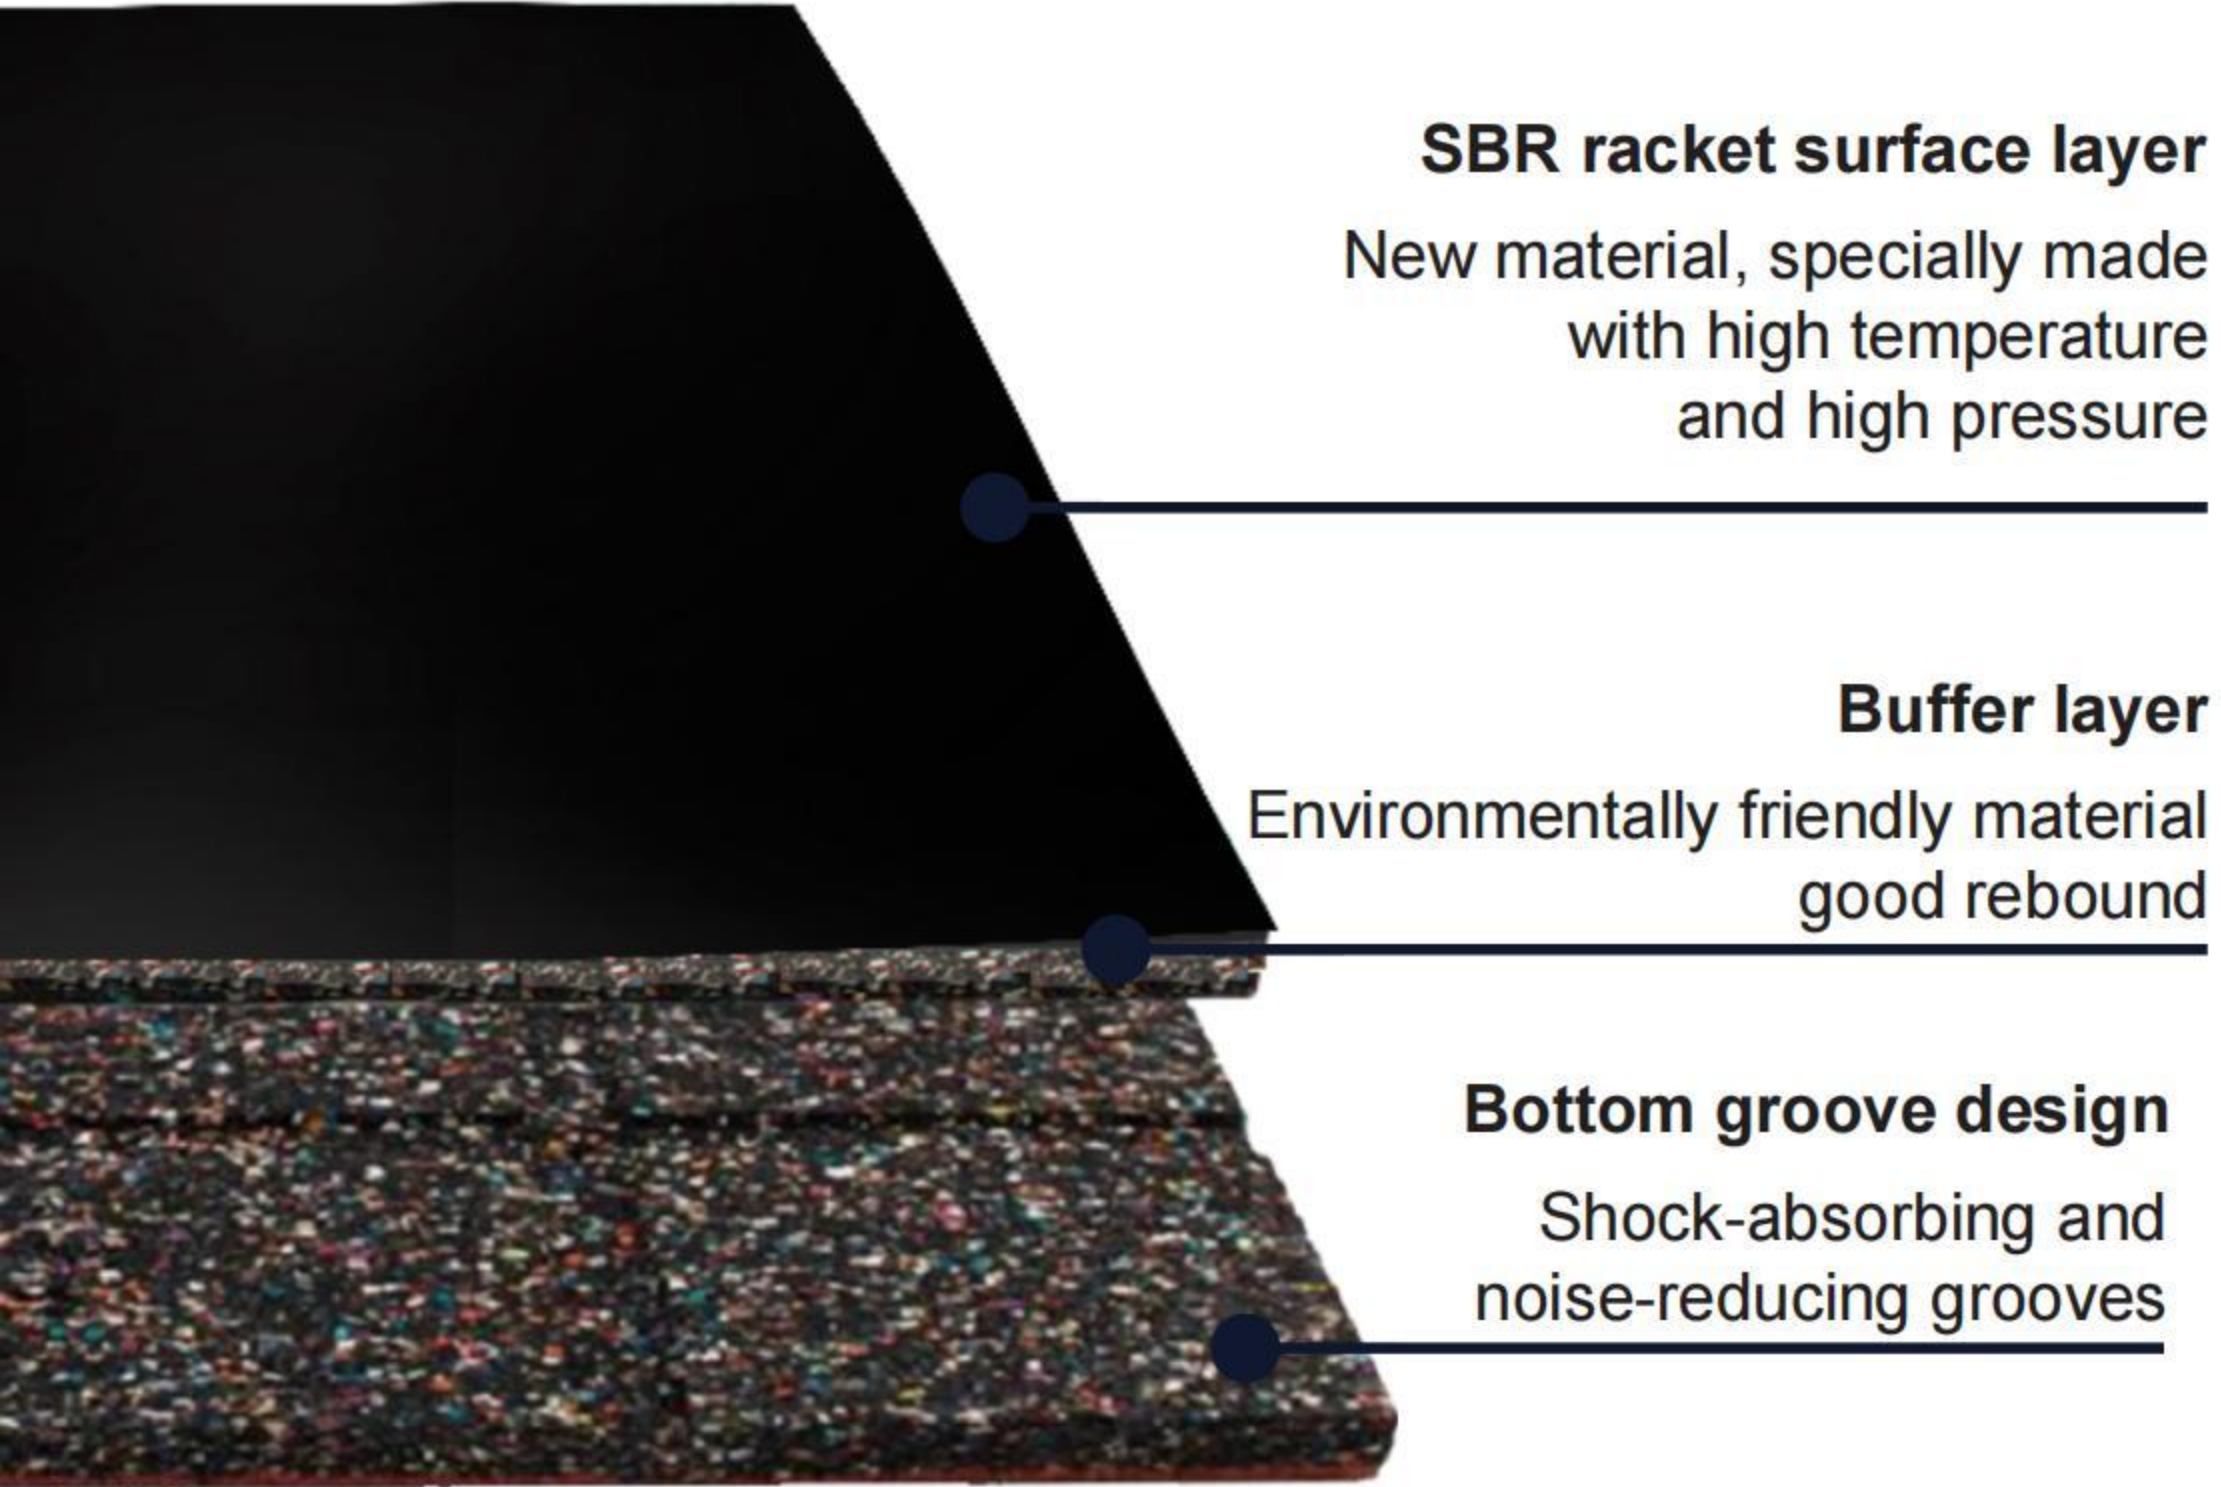

NOISE-REDUCED

Size (mm)	Thickness (mm)
500*500	15 / 20 / 25 / 30 / 35 / 40 / 45 / 50
1000*500	15 / 20 / 25 / 30 / 35 / 40 / 45 / 50
1000*1000	15 / 20 / 25 / 30 / 35



Anti-Slip Rubber Flooring



Hospital



School



Office



Kindergarten



Store



Restaurant



Beadhouse




Other



Application field

A P P L I C A T I O N F I E L D

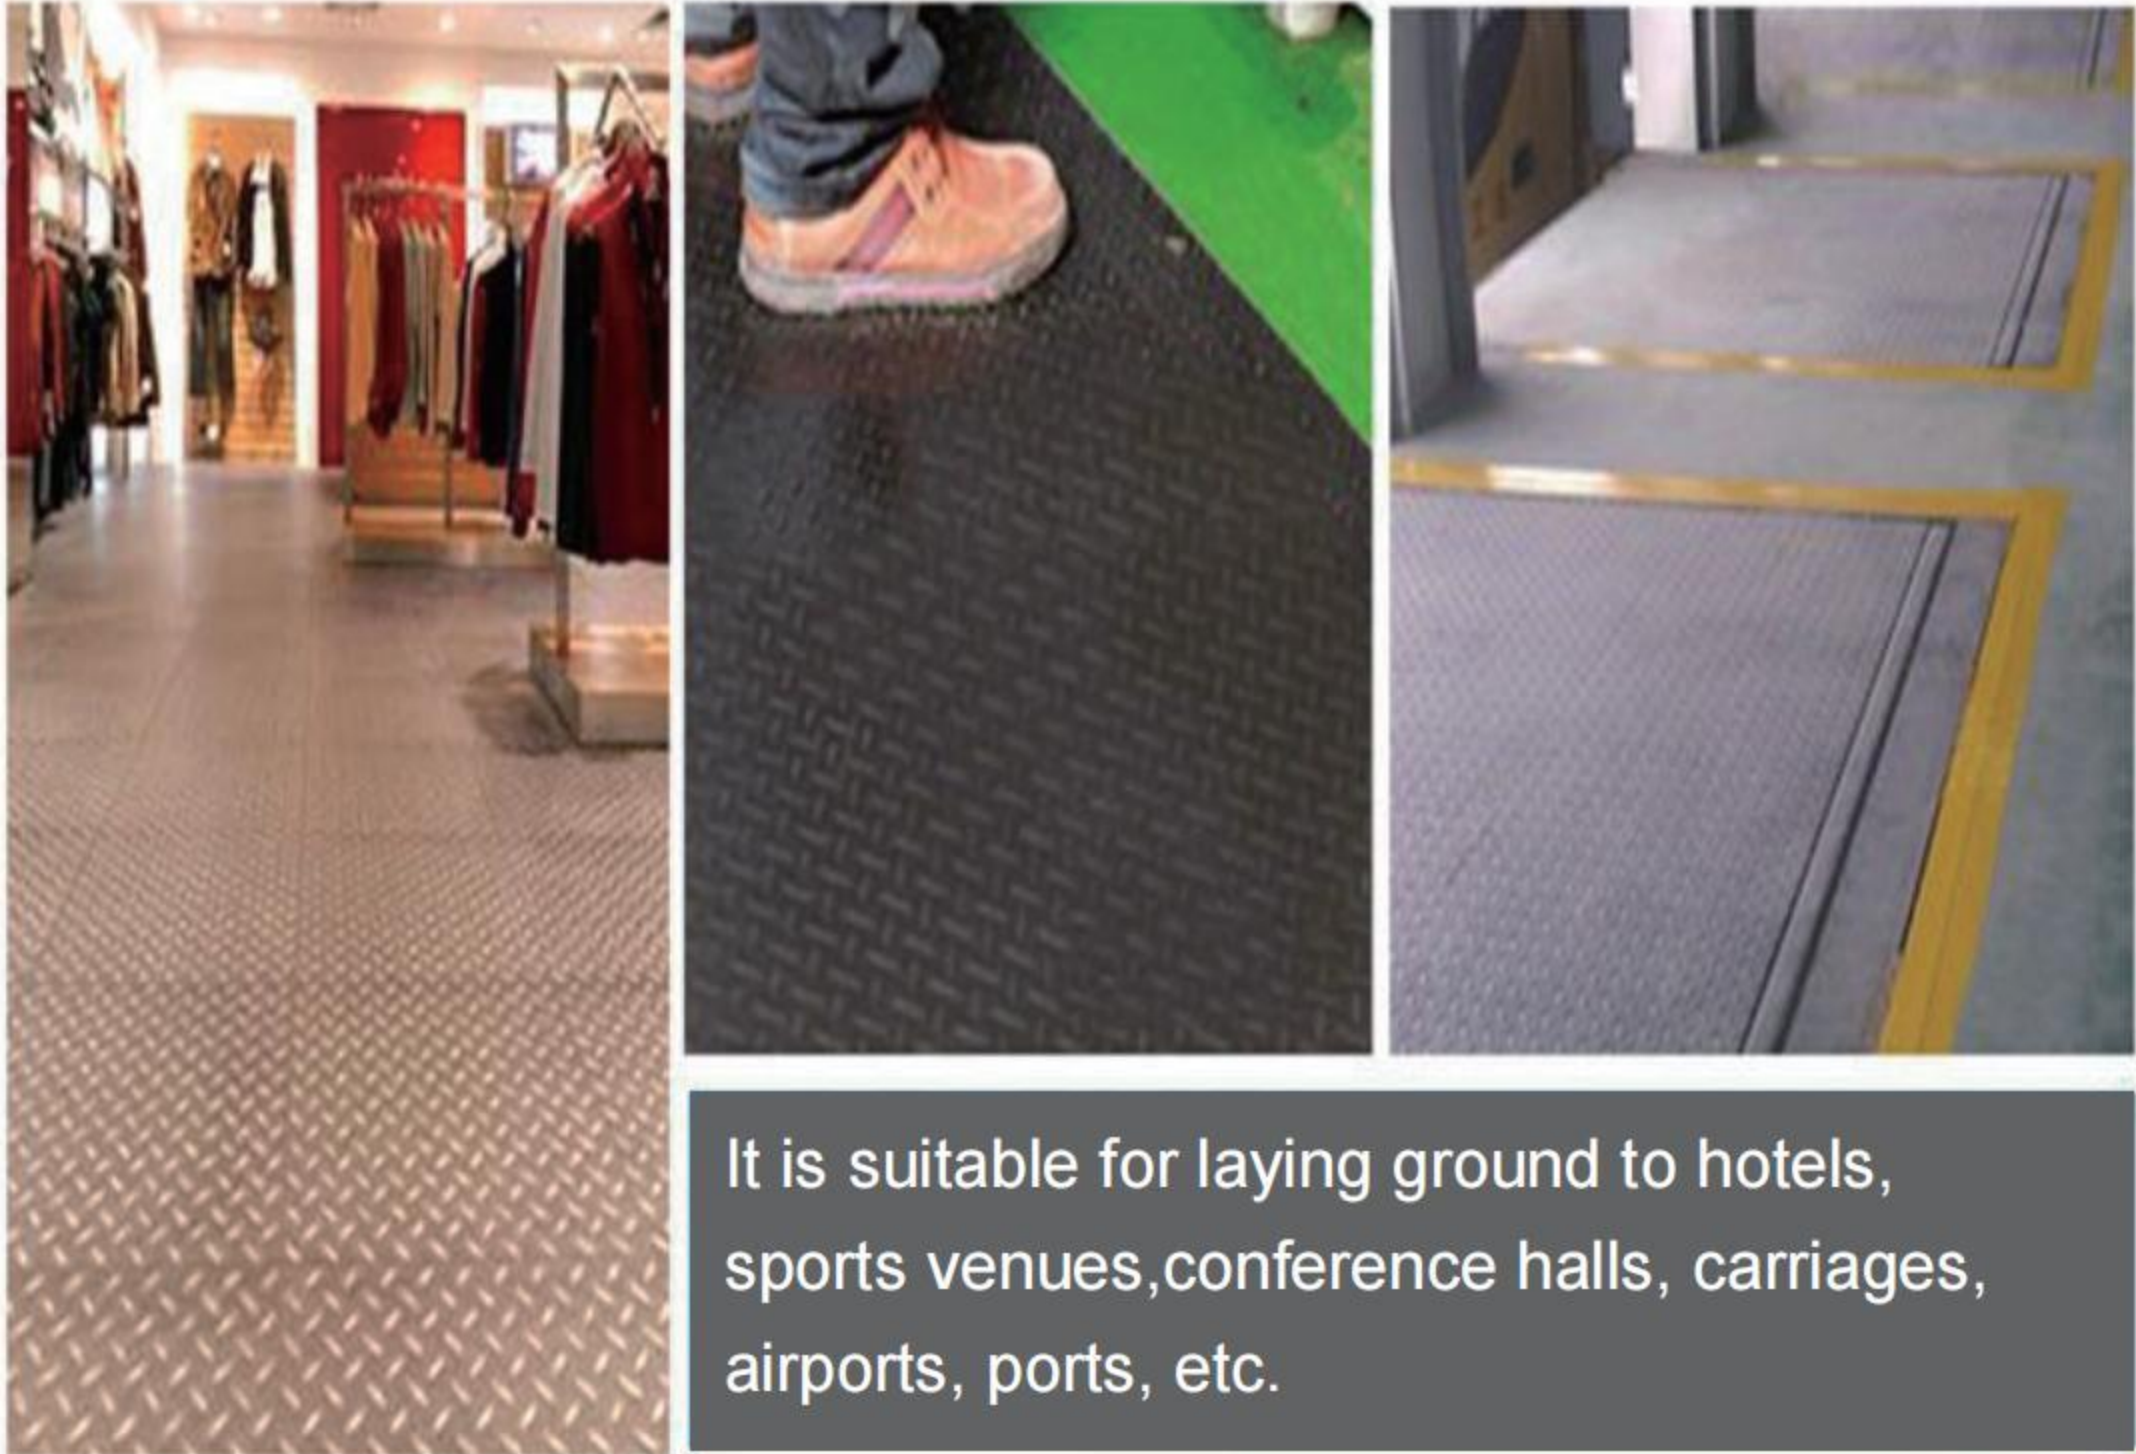

It is suitable for laying ground to hotels, sports venues, conference halls, carriages, airports, ports, etc.

The Anti-slip Rubber Flooring has an anti-slip pattern surface, and cloth impression pattern on the reverse, fabric insertion available, which is environmental protection, easy to install, clean and dry. It has great capacity of wearing resistance, aging resistance, waterproofing, anti-slipping, anti-fatigue, heavy duty, shock absorption and better resilience.


Anti-Slip Rubber Flooring



Model:CZY601
Round dot




Model:CZY602
Willow Leaves

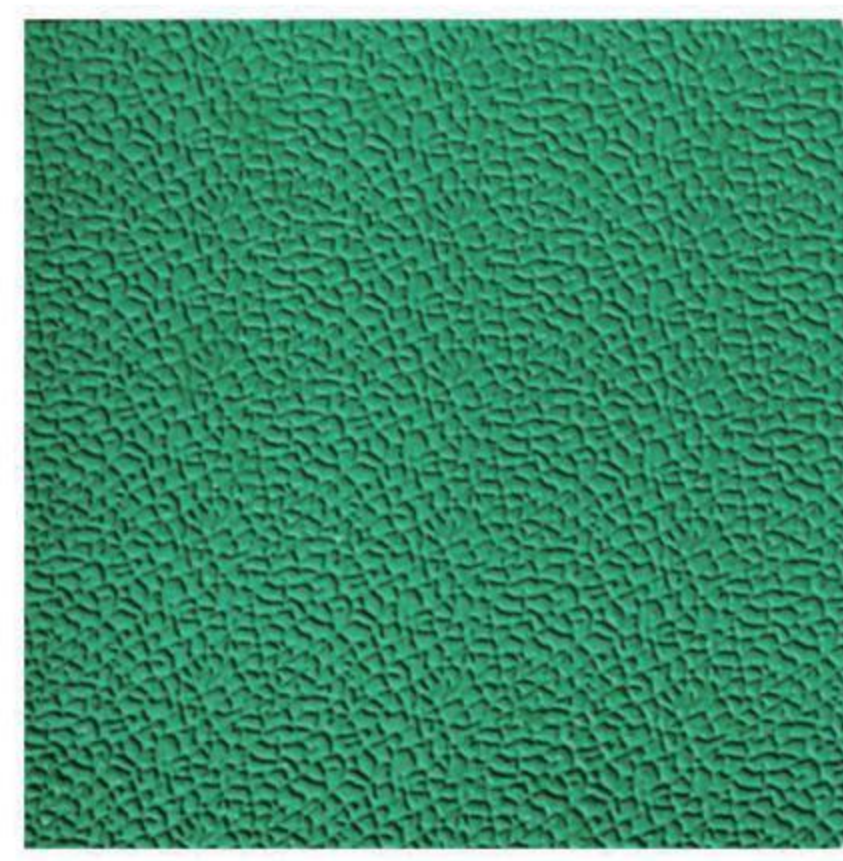


Model:RL-CZY607
Orange Peel




Model:RL-CZY608
Diamond

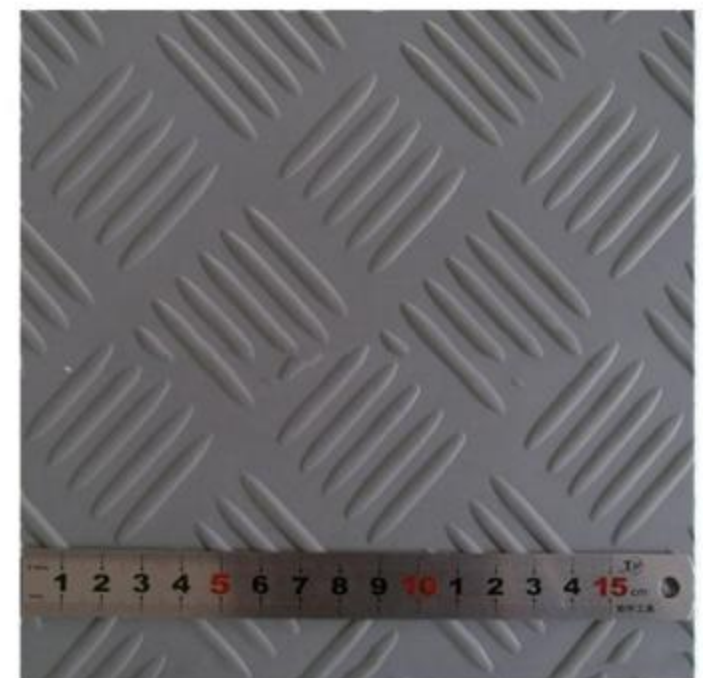

Model:CZY603
Checker rubber

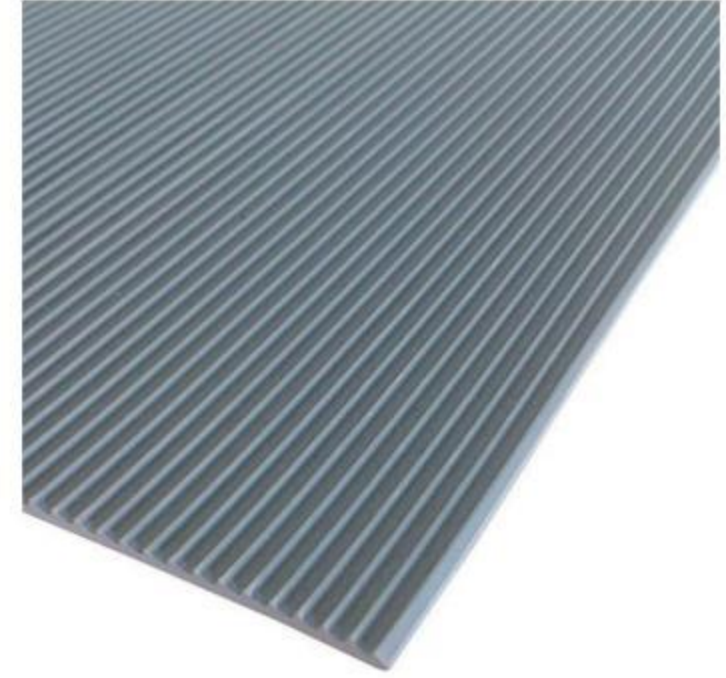

Model:ZY604
Corrugate

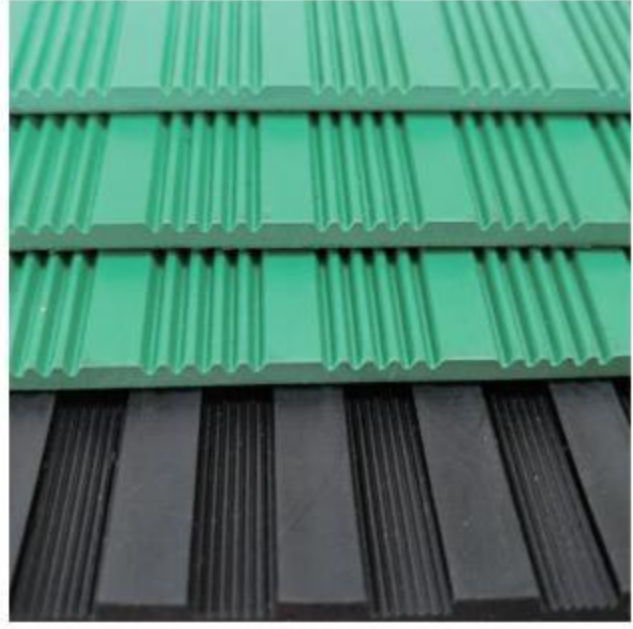

Model:CZY605
Fine Ribbed





Model:CZY606
Broad Ribbed

Material	Hardness shore A	S.G. g/cm ³	Tensile strength MPA	Elongation at break %
NR/SBR	65±5	1.5	3	200
NR/SBR	65±5	1.45	4	220
NR/SBR	65±5	1.4	5	250
Standard width	0.915m up to 2m			
Standard length	10m-20m			
Standard thickness	3mm up to 6mm			

Other texture patterns are updating, welcome to contact us for further details. Customise size and hardness available upon request.



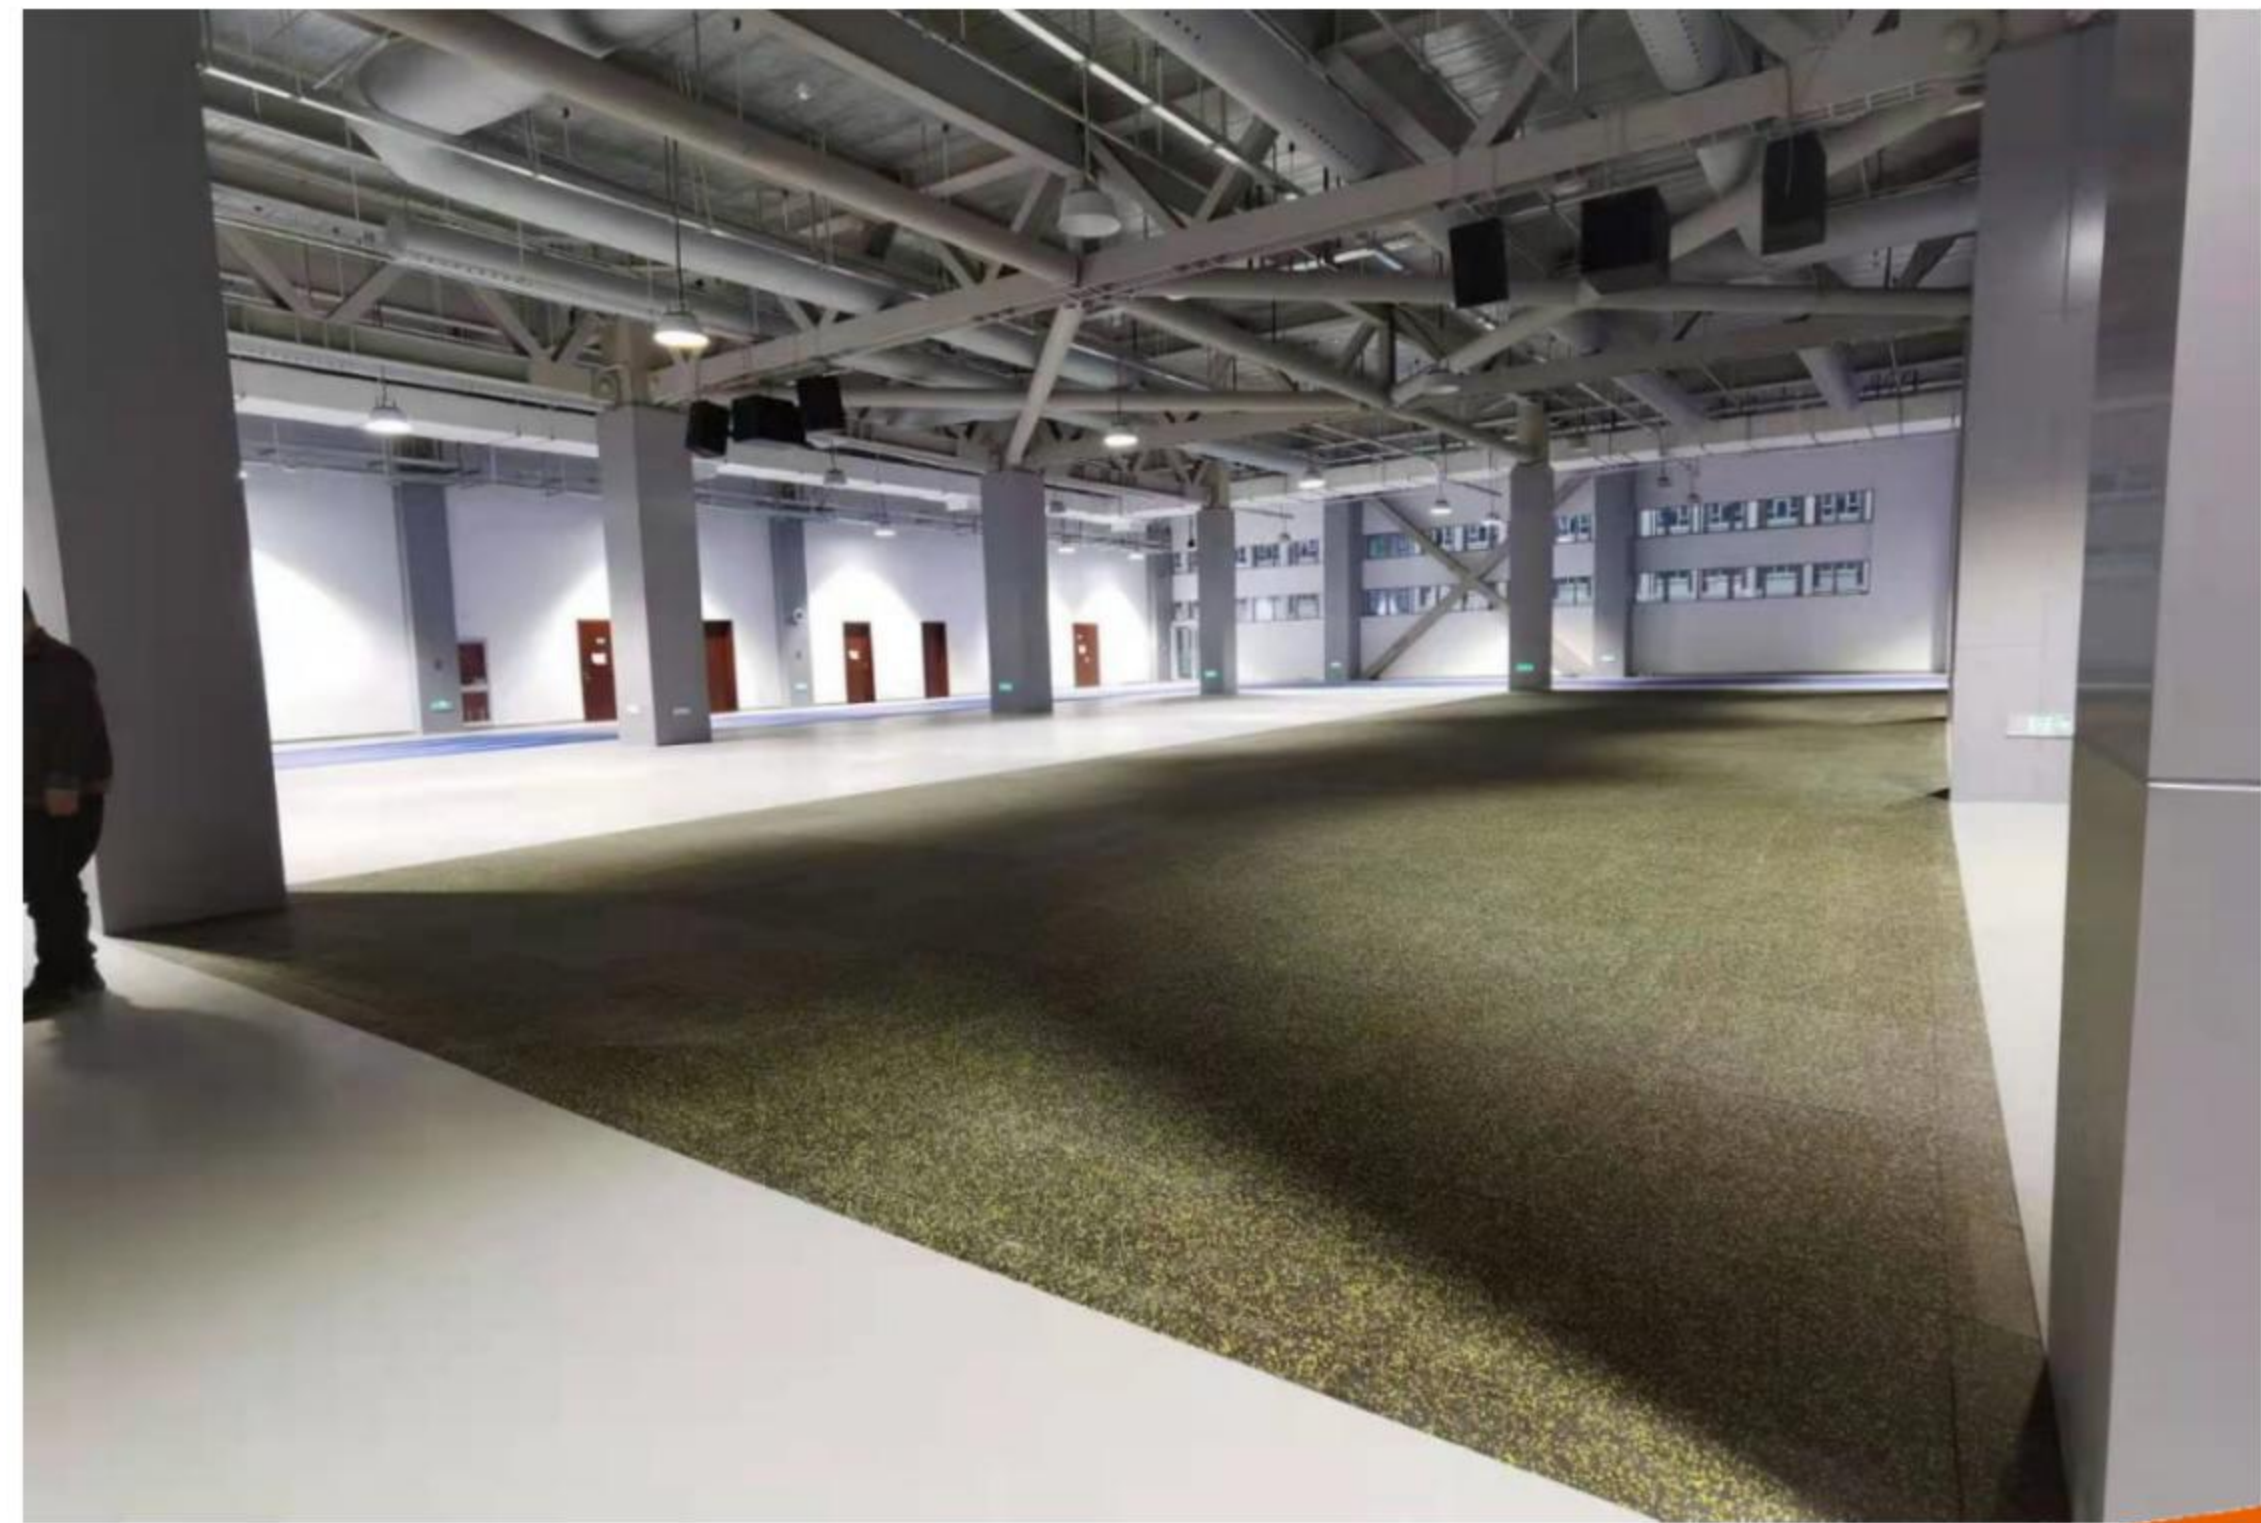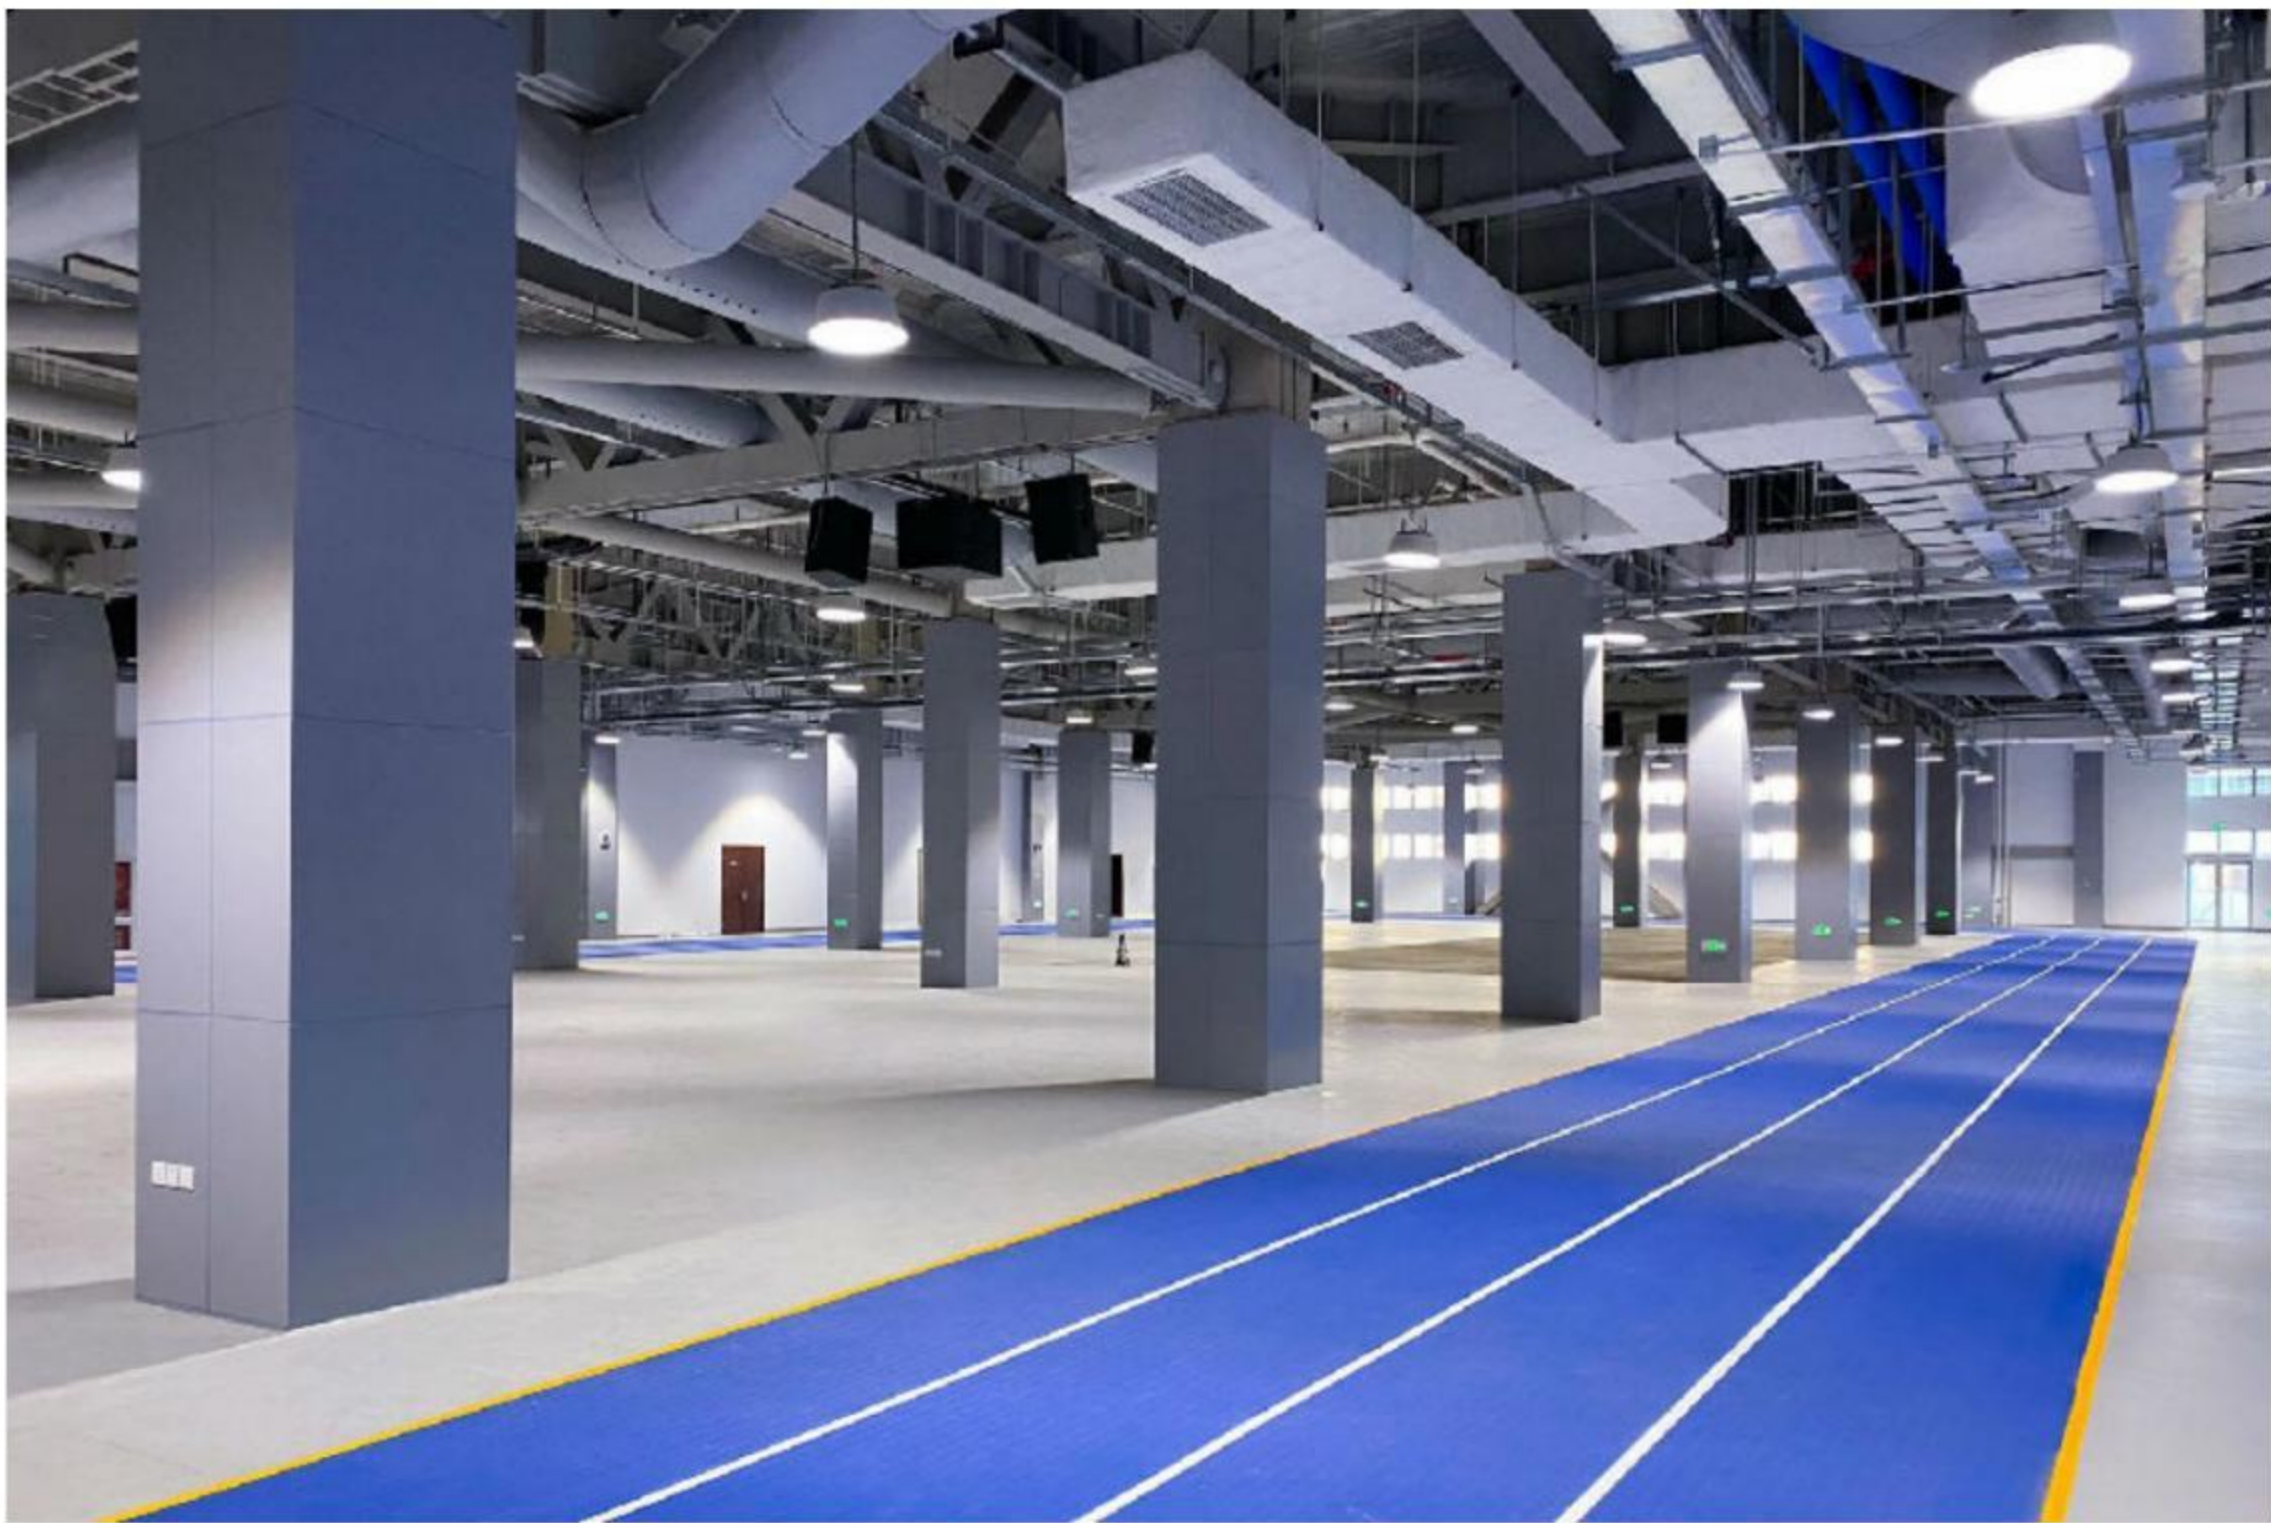







-  Hospital
-  School
-  Office
-  Kindergarten
-  Store
-  Restaurant
-  Beadhouse
-  Other

















